




UĞUR

The image features a logo on a brushed metal background. To the left of the text is a stylized symbol consisting of a series of horizontal lines of varying lengths, creating a fan-like or comb-like appearance. To the right of this symbol, the word "UĞUR" is rendered in large, bold, three-dimensional capital letters. The letters have a metallic finish and cast soft shadows on the surface below them. The entire composition is set against a background of horizontal brushed metal lines, with a bright light source from the upper left creating a strong highlight and gradient across the scene.

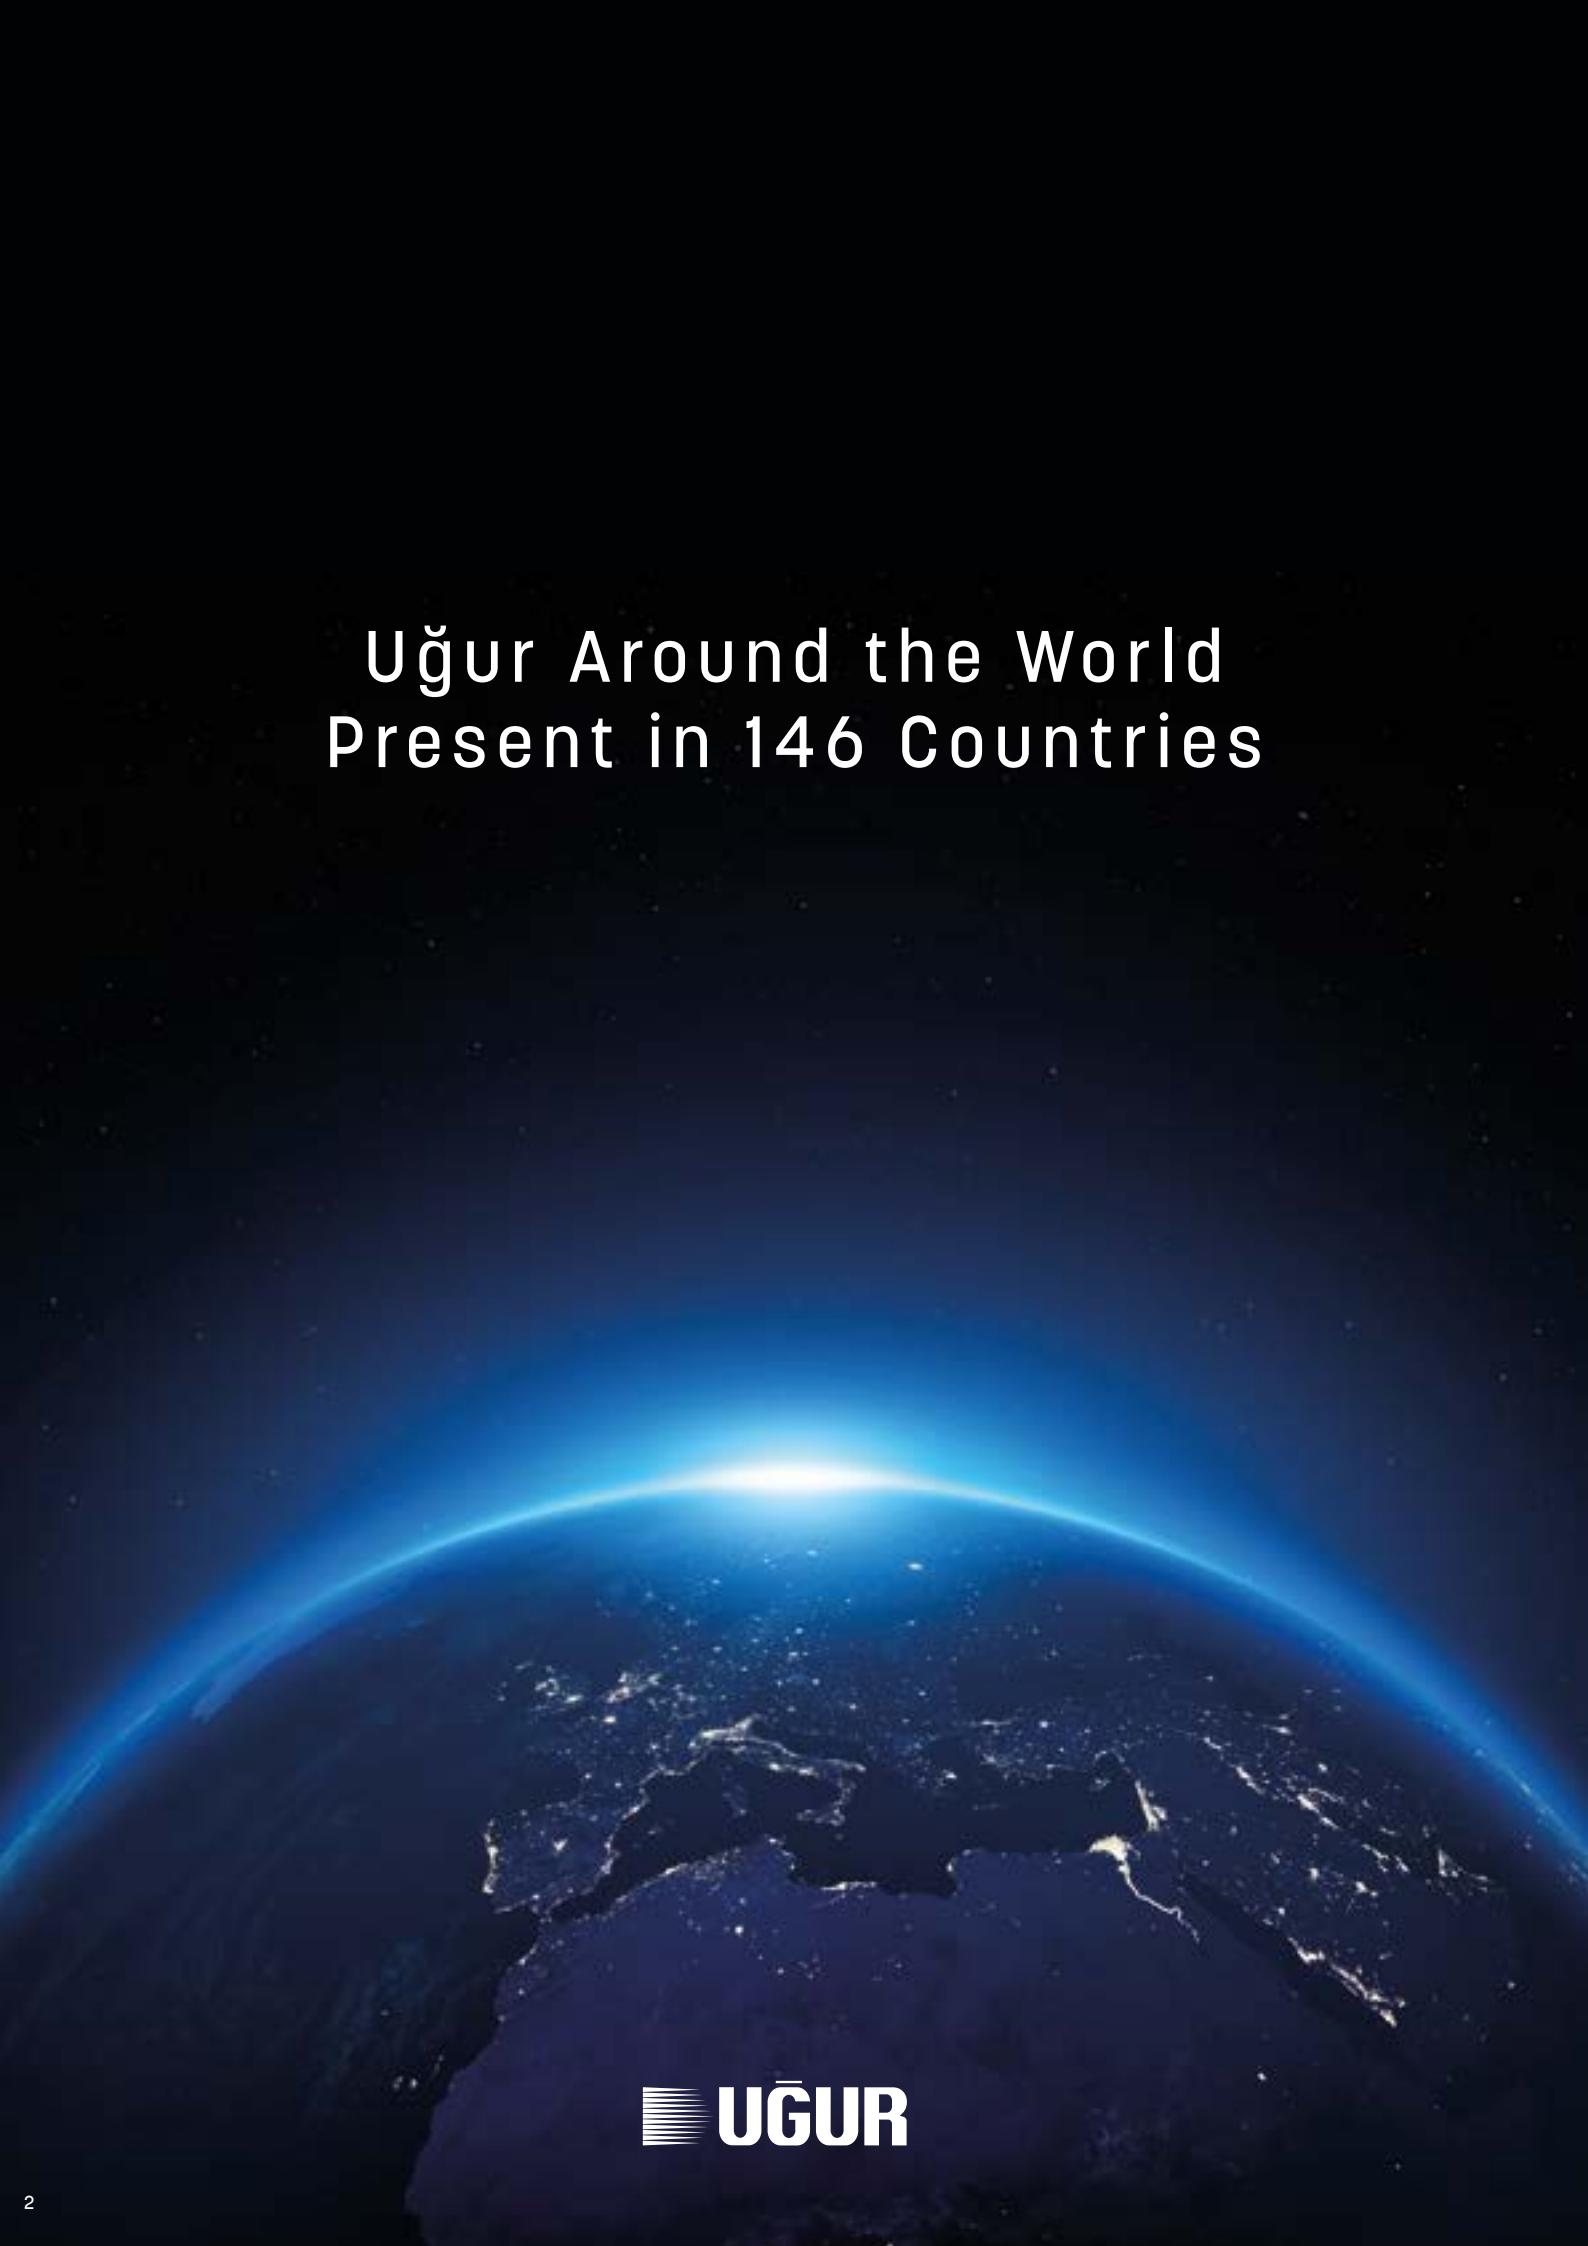

Uğur Around the World Present in 146 Countries

Bottle Coolers

UCOOL Series	18
Single-Door Bottle Coolers	48
Multi-Door Bottle Coolers	70
Sliding-Door Bottle Coolers	82

Freezers

Chest Freezers	88
Ice Cream Conservators	100
Upright Freezers	120

Supermarket Solutions

Open Coolers	132
İzmir Series	140
Antalya Series	144
Marmaris Series	148
Aspen	150

HoReCa

Ice Cream Display Cabinets	152
Bakery Display Cabinets	172
Cold Beverage Dispensers	174
Ice Makers	178
Water Dispensers	182

HV UC00L



TAILORED IDENTITY

Manufactured to match your style with customizable aluminum frame colors.



MORE VISIBILITY WITH HIGH VISION

LED illumination inside the door.



PERFECT ALIGNMENT

Superior merchandising with a seamless side-by-side appearance.



BRAND PRESENCE

Make your brand stand out with a strong, distinctive presence at the point of sale.



REFINED FINISH

The stepped base design enhances the premium appearance while providing a clean and refined finish.



LUCE




CUSTOMIZE YOUR LOOK

Smooth contours with radiused light frame corners available in your preferred color.



MORE VISIBILITY

LED illumination on both the inner and outer door frame.

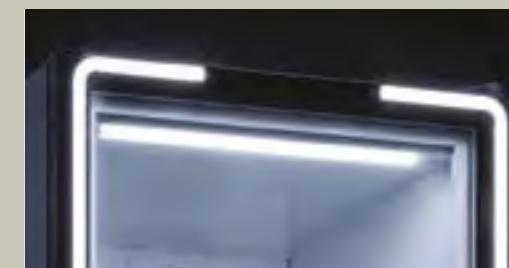


PREMIUM VISUAL IMPACT

Elegant and eye-catching aesthetics with LED lighting beneath the elastomer gasket, available in your preferred color.



BRAND PRESENCE

Create a distinctive brand identity with your preferred aluminum frame color.

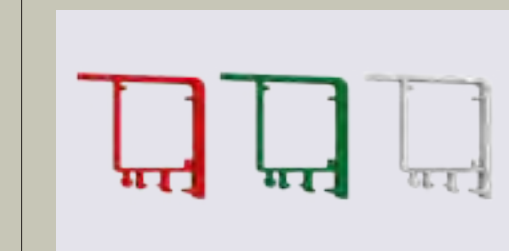

REFINED FINISH

The stepped base design enhances the premium appearance while providing a clean and refined finish.



ORION



ILLUMINATED ELEGANCE

A perfect combination of aesthetics and functionality with LED lighting beneath the gasket, available in custom colors.



MORE VISIBILITY

LED illumination on both the inner and outer door frame




PREMIUM DURABILITY

The aluminum profile surrounding the illuminated gasket delivers both durability and premium aesthetics.



BRAND PRESENCE

Create a distinctive brand identity with your preferred aluminum frame color.

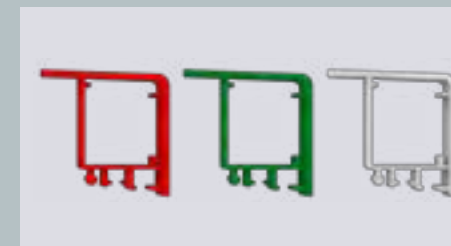

REFINED FINISH

The stepped base design enhances the premium appearance while providing a clean and refined finish.



EDGE




TAILORED TO YOUR BRAND

Personalize your frameless design with aluminum frame options available in a variety of colors.



MORE VISIBILITY

LED illumination on both the inner and outer door frame

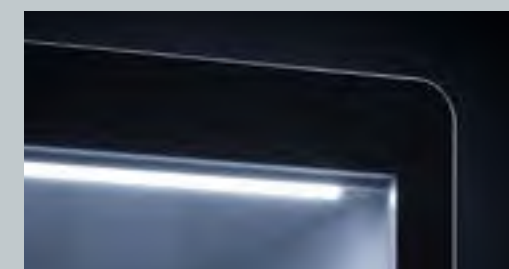

FULL-VIEW GLASS

Frameless full-glass doors create a seamless front view, maximizing product visibility and delivering a premium merchandising display.



LONG-LASTING DURABILITY

The durable aluminum radius profile provides long-lasting strength while maintaining a premium appearance.



NEON



CUSTOMIZABLE LED COLORS

Your products always stand out with LED lighting in the glass color of your choice.



MORE VISIBILITY

LED illumination on both the inner and outer door frame.



FULL-VIEW GLASS

Frameless full-glass doors create a seamless front view, maximizing product visibility and delivering a premium merchandising display.



SEAMLESS APPEARANCE

Frameless L-corner glass design for a seamless and contemporary appearance.



EDGE NEON




TAILORED TO YOUR BRAND

Take full control of your design with aluminum frames available in your preferred color.



MORE VISIBILITY

LED illumination on both the inner and outer door frame.

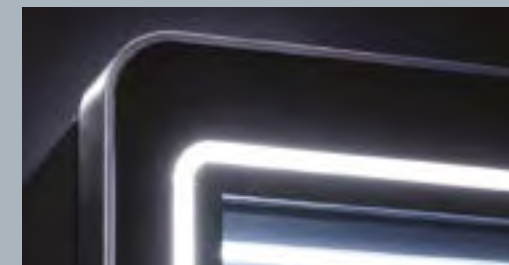

FULL-VIEW GLASS

Frameless full-glass doors create a seamless front view, maximizing product visibility and delivering a premium merchandising display.



STAND OUT IN STYLE

LED-illuminated frameless glass design in your preferred color keeps your products in the spotlight at all times.



FRAMELESS



SEAMLESS APPEARANCE

Frameless L-corner glass design for a seamless and contemporary appearance.



MORE VISIBILITY

LED illumination on both the inner and outer door frame.



FULL GLASS DOORS

Frameless full-glass doors create a seamless front view, maximizing product visibility and delivering a premium merchandising display.





Bottle Coolers

→ **UCOOL Series** **Page 18**

Single-Door Bottle Coolers Page 48

Multi-Door Bottle Coolers Page 70

Sliding-Door Bottle Coolers Page 82





USS 750 DTK
HV UC00L



HV: High Visibility



UC00L: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



USS 900 D2K HV UC00L



USS 1500 D3K HV UC00L

GENERAL CHARACTERISTICS	USS 500 DTK HV UC00L	USS 600 DTK HV UC00L	USS 750 DTK HV UC00L	USS 900 D2K HV UC00L	USS 1200 D2K HV UC00L	USS 1500 D3K HV UC00L
Available Energy Class Options*	B/C	B/C/D	B/C/D	B/C	B/C/D	B/C/D
Gross Volume (L)	463	569	739	898	1230	1552
Climate Class	CC2	CC2	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	7	7	7	13	13	20
Can Capacity (330 ml)	498	581	830	996	1328	1743
Can Capacity (500 ml)	288	336	480	576	768	1008
PET Bottle Beverage Capacity (500 ml)	270	360	450	540	720	990
Facing (330 cc Can)	6	7	10	12	17	21
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
W x D x H (mm) Without Packaging	500x760x2137	595x760x2137	750x760x2137	900x760x2137	1200x760x2137	1500x760x2137
W x D x H (mm) With Packaging	535x800x2275	635x800x2275	770x800x2275	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	111	123,5	143	167	203	257,5
Weight With Packaging (kg)	122	136	156,5	177,5	215,5	274
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
Containers 20'	N/A	N/A	N/A	N/A	N/A	N/A
Containers 40'	N/A	N/A	N/A	N/A	N/A	N/A
Containers 40' HC	69	51	45	38	28	22
13.6 Truck	76	63	51	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 750 DTK
HV UCOOL NEON



HV: High Visibility



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Full Glass



Frameless L-corner glass design



Glass color of your choice



USS 1200 D2K HV UCOOL NEON



USS 1500 D3K HV UCOOL NEON

GENERAL CHARACTERISTICS	USS 600 DTK HV UCOOL NEON	USS 750 DTK HV UCOOL NEON	USS 900 D2K HV UCOOL NEON	USS 1200 D2K HV UCOOL NEON	USS 1500 D3K HV UCOOL NEON
Available Energy Class Options*	C / D	C / D	C / D	C / D	C / D
Gross Volume (L)	569	739	898	1230	1552
Climate Class	CC2	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	7	7	13	13	20
Can Capacity (330 ml)	581	830	996	1328	1743
Can Capacity (500 ml)	336	480	576	768	1008
PET Bottle Beverage Capacity (500 ml)	360	450	540	720	990
Facing (330 cc Can)	7	10	12	17	21
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
W x D x H (mm) Without Packaging	595x770x2137	750x770x2137	900x735x2137	1200x735x2137	1500x735x2137
W x D x H (mm) With Packaging	630x800x2275	760x800x2275	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	125,5	145,5	169	205	259,5
Weight With Packaging (kg)	138	158,5	179,5	217,5	273
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
Containers 20'	-	-	-	-	-
Containers 40'	-	-	-	-	-
Containers 40' HC	51	45	38	28	22
13.6 Truck	63	51	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 750 DTK
UCOOL



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



USS 900 D2K UCOOL



USS 1500 D3K UCOOL

GENERAL CHARACTERISTICS	USS 500 DTK UCOOL	USS 600 DTK UCOOL	USS 750 DTK UCOOL	USS 900 D2K UCOOL	USS 1200 D2K UCOOL	USS 1500 D3K UCOOL
Available Energy Class Options*	B/C/D	B/C/D	B/C/D	B/C	B/C/D/E	B/C/D
Gross Volume (L)	433	530	690	840	1148	1456
Climate Class	CC2	CC2	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	6	6	6	12	12	12
Can Capacity (330 ml)	462	539	830	924	1232	1617
Can Capacity (500 ml)	294	343	590	588	784	1029
PET Bottle Beverage Capacity(500 ml)	252	336	450	504	672	924
Facing (330 cc Can)	6	7	10	12	16	21
DIMENSIONS						
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
W x D x H (mm) Without Packaging	500x785x2137	595x785x2137	750x785x2137	900x785x2137	1200x785x2137	1500x785x2137
W x D x H (mm) With Packaging	535x755x2275	635x755x2275	770x755x2275	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	116	122	143	167	202	258
Weight With Packaging (kg)	123	134	155	177	214	270
LOADING CAPACITY						
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
Containers 20'	N/A	N/A	N/A	N/A	N/A	N/A
Containers 40'	N/A	N/A	N/A	N/A	N/A	N/A
Containers 40' HC	67	54	45	38	33	22
13.6 Truck	79	63	54	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 750 DTK
UCOOL NEON



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Frameless L-corner glass design



Glass color of your choice



USS 1200 D2K UCOOL NEON



USS 1500 D3K UCOOL NEON

GENERAL CHARACTERISTICS	USS 500 DTK UCOOL NEON	USS 600 DTK UCOOL NEON	USS 750 DTK UCOOL NEON	USS 900 D2K UCOOL NEON	USS 1200 D2K UCOOL NEON	USS 1500 D3K UCOOL NEON
Available Energy Class Options*	C / D	C / D	C / D	C / D	C / D	C / D
Gross Volume (L)	433	530	690	840	1148	1452
Climate Class	CC2	CC2	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	6	6	6	12	12	18
Can Capacity (330 ml)	462	539	770	924	1232	1617
Can Capacity (500 ml)	294	343	490	588	784	1029
PET Bottle Beverage Capacity(500 ml)	252	336	420	504	672	924
Facing (330 cc Can)	6	7	10	12	16	21
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
W x D x H (mm) Without Packaging	500x735x2137	595x735x2137	750*735x2137	900x735x2137	1200x735x2137	1500x735x2137
W x D x H (mm) With Packaging	535x755x2275	630x755x2275	760x755x2275	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	118	124	145	169	204	260
Weight With Packaging (kg)	125	135	157	179	216	272
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
Containers 20'	-	-	-	-	-	-
Containers 40'	-	-	-	-	-	-
Containers 40' HC	67	54	45	38	28	22
13.6 Truck	79	63	54	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



HV UCOOL FRAMELESS



USS 750 DTK
HV UCOOL FRAMELESS



HV: High Visibility



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Frameless

HV UCOOL FRAMELESS



USS 1200 DTK HV UCOOL FRAMELESS



USS 1500 D3K HV UCOOL FRAMELESS

GENERAL CHARACTERISTICS	USS 500 DTK HV UCOOL FRAMELESS	USS 600 DTK HV UCOOL FRAMELESS	USS 750 DTK HV UCOOL FRAMELESS	USS 900 D2K HV UCOOL FRAMELESS	USS 1200 D2K HV UCOOL FRAMELESS	USS 1500 D3K HV UCOOL FRAMELESS
Available Energy Class Options*	C / D	C / D	C / D	C / D	C / D	C / D
Gross Volume (L)	463	569	739	898	1230	1552
Climate Class	CC2	CC2	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	7	7	7	13	13	20
Can Capacity (330 ml)	498	581	830	996	1328	1743
Can Capacity (500 ml)	288	336	480	576	768	1008
PET Bottle Beverage Capacity(500 ml)	270	360	460	540	720	990
Facing (330 cc Can)	6	7	10	12	17	21
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
W x D x H (mm) Without Packaging	500x770x2137	595x770x2137	750x770x2137	900x735x2137	1200x735x2137	1500x735x2137
W x D x H (mm) With Packaging	535x800x2275	630x800x2275	760x800x2275	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	113	125,5	145,5	169	205	259,5
Weight With Packaging (kg)	124	138	158,5	179,5	217,5	273
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.						
Containers 20'	-	-	-	-	-	-
Containers 40'	-	-	-	-	-	-
Containers 40' HC	60	51	45	38	28	22
13.6 Truck	76	63	51	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 750 DTK
HV UC00L EDGE



HV: High Visibility



UC00L: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Colorful aluminum frame option



Durable radius form



USS 900 D2K HV UC00L EDGE



USS 1200 D2K HV UC00L EDGE

GENERAL CHARACTERISTICS	USS 600 DTK HV UC00L EDGE	USS 750 DTK HV UC00L EDGE	USS 900 D2K HV UC00L EDGE	USS 1200 D2K HV UC00L EDGE
Available Energy Class Options*	C/D	C/D	C/D	C/D
Gross Volume (L)	569	739	898	1230
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	0-3,5-7	0-3,5-7	0-3,5-7	0-3,5-7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	7	7	13	13
Can Capacity (330 ml)	581	830	996	1328
Can Capacity (500 ml)	336	480	576	768
PET Bottle Beverage Capacity (500 ml)	360	450	540	720
Facing (330 cc Can)	7	10	12	17
DIMENSIONS				
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	595x770x2192	750x770x2192	900x735x2192	1200x735x2192
W x D x H (mm) With Packaging	630x800x2330	760x800x2330	935x755x2330	1235x755x2330
Weight Without Packaging (kg)	139,5	146,5	197	211
Weight With Packaging (kg)	153	160	209,5	223,5
LOADING CAPACITY				
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	-	-	-	-
Containers 40'	-	-	-	-
Containers 40' HC	51	45	38	28
13.6 Truck	63	51	46	33

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 750 DTK
HV UCOOL EDGE NEON



HV: High Visibility



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Colorful aluminum frame option



Durable radius form



Full Glass + Glass color of your choice



Frameless L-corner glass design



USS 900 D2K HV UCOOL EDGE NEON



USS 1200 D2K HV UCOOL EDGE NEON

GENERAL CHARACTERISTICS	USS 500 DTK HV UCOOL EDGE NEON	USS 600 DTK HV UCOOL EDGE NEON	USS 900 D2K HV UCOOL EDGE NEON	USS 1200 D2K HV UCOOL EDGE NEON
Available Energy Class Options*	C/D	C/D	C/D	C/D
Gross Volume (L)	463	569	898	1230
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	0-3,5-7	0-3,5-7	0-3,5-7	0-3,5-7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Electronic	Electronic	Electronic	Electronic
Number of Shelves**	7	7	13	13
Can Capacity (330 ml)	498	581	996	1328
Can Capacity (500 ml)	288	336	576	768
PET Bottle Beverage Capacity (500 ml)	270	360	540	720
Facing (330 cc Can)	7	7	12	17
DIMENSIONS				
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	500x770x2192	595x770x2192	900x735x2192	1200x735x2192
W x D x H (mm) With Packaging	535x800x2330	635x800x2330	935x755x2230	1235x755x2330
Weight Without Packaging (kg)	134,5	139,5	197	211
Weight With Packaging (kg)	148	153	209,5	223,5
LOADING CAPACITY				
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	-	-	-	-
Containers 40'	-	-	-	-
Containers 40' HC	60	51	38	28
13.6 Truck	76	63	46	33

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.
**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



HV UCOOL LUCE



USS 500 DTK
HV UCOOL LUCE



HV: High Visibility



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Smooth contours with radius plastic frame

HV UCOOL LUCE



USS 600 DTK HV UCOOL LUCE



USS 750 DTK HV UCOOL LUCE

GENERAL CHARACTERISTICS	USS 500 DTK HV UCOOL LUCE	USS 600 DTK HV UCOOL LUCE	USS 750 DTK HV UCOOL LUCE
Available Energy Class Options*	C / D	C / D	C / D
Gross Volume (L)	463	569	739
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	7	7	7
Can Capacity (330 ml)	498	581	830
Can Capacity (500 ml)	288	336	480
PET Bottle Beverage Capacity (500 ml)	270	360	450
Facing (330 cc Can)	7	7	10
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	500x795x2137	595x795x2137	750x795x2137
W x D x H (mm) With Packaging	535x820x2275	630x820x2275	760x820x2275
Weight Without Packaging (kg)	111.5	124	143.5
Weight With Packaging (kg)	122.5	136.5	157
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	-	-	-
Containers 40'	-	-	-
Containers 40' HC	58	50	42
13.6 Truck	73	58	50

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 900 D2K
HV UCOOL LUCE



HV: High Visibility



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Smooth contours with radius plastic frame



USS 600 DTK HV UCOOL LUCE



USS 750 DTK HV UCOOL LUCE

GENERAL CHARACTERISTICS	USS 900 D2K HV UCOOL LUCE	USS 1200 D2K HV UCOOL LUCE	USS 1500 D3K HV UCOOL LUCE
Available Energy Class Options*	C / D	C/D	C / D
Gross Volume (L)	898	1230	1558
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	13	13	14
Can Capacity (330 ml)	996	1328	1743
Can Capacity (500 ml)	576	768	1008
PET Bottle Beverage Capacity (500 ml)	540	720	990
Facing (330 cc Can)	12	17	21
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	900x755x2137	1200x806x2137	1500x755x2137
W x D x H (mm) With Packaging	935x790x2275	1235x790x2275	1535x790x2275
Weight Without Packaging (kg)	167.5	202	258
Weight With Packaging (kg)	178	214	271.5
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20"	-	11	-
Containers 40"	-	24	-
Containers 40" HC	30	24	22
13.6 Truck	42	33	25

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 900 D2K
HV UCOOL LUCE



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



Smooth contours with radius plastic frame



USS 1200 D2K UCOOL LUCE



USS 1500 D3K UCOOL LUCE

GENERAL CHARACTERISTICS	USS 900 D2K UCOOL LUCE	USS 1200 D2K UCOOL LUCE	USS 1500 D3K UCOOL LUCE
Available Energy Class Options*	C / D	C / D	C / D
Gross Volume (L)	840	1148	1452
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	12	12	18
Can Capacity (330 ml)	924	1232	1617
Can Capacity (500 ml)	588	784	1029
PET Bottle Beverage Capacity (500 ml)	504	672	924
Facing (330 cc Can)	12	16	21
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	900x755x2137	1200x755x2137	1500x755x2137
W x D x H (mm) With Packaging	935x790x2275	1235x790x2275	1535x790x2275
Weight Without Packaging (kg)	140.5	167.5	255
Weight With Packaging (kg)	154	175	268.5
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	-	-	-
Containers 40'	-	-	-
Containers 40' HC	30	24	22
13.6 Truck	42	33	25

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



HV UCOOL ORION



USS 500 DTK
HV UCOOL ORION



HV: High Visibility



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



LED lighting beneath the gasket



Available in custom colors

HV UCOOL ORION



USS 600 DTK HV UCOOL ORION



USS 750 DTK HV UCOOL ORION

GENERAL CHARACTERISTICS	USS 500 DTK HV UCOOL ORION	USS 600 DTK HV UCOOL ORION	USS 750 DTK HV UCOOL ORION
Available Energy Class Options*	C / D	C / D	D
Gross Volume (L)	463	569	739
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	7	7	10
Can Capacity (330 ml)	498	581	830
Can Capacity (500 ml)	288	336	480
PET Bottle Beverage Capacity (500 ml)	270	360	450
Facing (330 cc Can)	7	7	10
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	500x770x2137	595x770x2137	750x760x2137
W x D x H (mm) With Packaging	535x800x2275	630x800x2275	770x800x2275
Weight Without Packaging (kg)	116	128,5	143
Weight With Packaging (kg)	127	141	156,5
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	-	-	-
Containers 40'	-	-	-
Containers 40' HC	29	25	45
13.6 Truck	60	51	51

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 900 D2K
HV UC00L ORION



HV: High Visibility



UC00L: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



LED lighting beneath the gasket



Available in custom colors



USS 1200 D2K HV UC00L ORION



USS 1500 D3K HV UC00L ORION

GENERAL CHARACTERISTICS	USS 900 D2K HV UC00L ORION	USS 1200 D2K HV UC00L ORION	USS 1500 D3K HV UC00L ORION
Available Energy Class Options*	C / D	C / D	C / D
Gross Volume (L)	898	1230	1552
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	13	13	20
Can Capacity (330 ml)	996	1328	1743
Can Capacity (500 ml)	576	768	1008
PET Bottle Beverage Capacity (500 ml)	540	720	990
Facing (330 cc Can)	12	17	21
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	900x735x2137	1200x735x2137	1500x735x2137
W x D x H (mm) With Packaging	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	172	208	262,5
Weight With Packaging (kg)	182,5	220,5	276
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	-	-	-
Containers 40'	-	-	-
Containers 40' HC	38	28	22
13.6 Truck	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 500 DTK
UCOOL ORION



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



LED lighting beneath the gasket



Available in custom colors



USS 600 DTK UCOOL ORION



USS 750 DTK UCOOL ORION

GENERAL CHARACTERISTICS	USS 500 DTK UCOOL ORION	USS 600 DTK UCOOL ORION	USS 750 DTK UCOOL ORION
Available Energy Class Options*	C/D	C / D	C / D
Gross Volume (L)	433	530	690
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	6	6	6
Can Capacity (330 ml)	462	539	770
Can Capacity (500 ml)	294	343	490
PET Bottle Beverage Capacity (500 ml)	252	336	420
Facing (330 cc Can)	6	7	10
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	500x785x2137	595x735x2137	750x735x2137
W x D x H (mm) With Packaging	535x755x2275	630x755x2275	760x755x2275
Weight Without Packaging (kg)	116	129	148,5
Weight With Packaging (kg)	123	141,5	162
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	-	-	-
Containers 40'	-	-	-
Containers 40' HC	67	54	45
13.6 Truck	79	63	54

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 900 D2K
UCOOL ORION



UCOOL: Perfect compatibility



Quick installation



LED inside the door



Customizable frame colors



LED lighting beneath the gasket



Available in custom colors



USS 1200 D2K UCOOL ORION



USS 1500 D3K UCOOL ORION

GENERAL CHARACTERISTICS	USS 900 D2K UCOOL ORION	USS 1200 D2K UCOOL ORION	USS 1500 D3K UCOOL ORION
Available Energy Class Options*	C / D	C / D	C / D
Gross Volume (L)	840	1148	1452
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Electronic	Electronic	Electronic
Number of Shelves**	12	12	18
Can Capacity (330 ml)	924	1232	1617
Can Capacity (500 ml)	588	784	1029
PET Bottle Beverage Capacity (500 ml)	504	672	924
Facing (330 cc Can)	12	16	21
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	900x735x2137	1200x735x2137	1500x735x2137
W x D x H (mm) With Packaging	935x755x2275	1235x755x2275	1535x755x2275
Weight Without Packaging (kg)	172,5	208,5	263
Weight With Packaging (kg)	183	221	276,5
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	-	-	-
Containers 40'	-	-	-
Containers 40' HC	38	28	22
13.6 Truck	46	33	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



Bottle Coolers

UCOOL Series Page 18

→ **Single-Door Bottle Coolers** **Page 48**

Multi-Door Bottle Coolers Page 70

Sliding-Door Bottle Coolers Page 82





USS 15 DTKL



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 60 DTKL



USS 95 DTKL

GENERAL CHARACTERISTICS	USS 15 DTKL	USS 60 DTKL	USS 95 DTK	USS 95 DTKL
Available Energy Class Options*	C/F	D/B	C/D	C/F
Gross Volume (L)	19	58,4	88	88
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic	Mechanic
Number of Shelves**	1	2	2	2
Can Capacity (330 ml)	18	40	75	75
Can Capacity (500 ml)	9	35	50	50
PET Bottle Beverage Capacity (500 ml)	9	20	50	50
Facing (330 cc Can)	3	5	5	5
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	295x366x573	445x475x715	480x530x870	480x520x840
W x D x H (mm) With Packaging	372x416x650	540x540x840	545x560x950	560x580x960
Weight Without Packaging (kg)	21	32,5	37,5	37,5
Weight With Packaging (kg)	23	37	43	43
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	252	80	80	80
Containers 40'	504	176	168	168
Containers 40' HC	504	264	168	168
13.6 Truck	672	300	192	192

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 160 DTK



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



USS 175 DTKL



USS 175 DTK Premium

GENERAL CHARACTERISTICS	USS 160 DTK	USS 175 DTK	USS 175 DTKL	USS 175 DTK Premium
Available Energy Class Options*	B/C/D	B/ /F	B/C/D/F	B/C/F
Gross Volume (L)	154	190	190	190
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic	Mechanic
Number of Shelves**	2	5	5	5
Can Capacity (330 ml)	140	180	180	180
Can Capacity (500 ml)	91	120	120	120
PET Bottle Beverage Capacity (500 ml)	96	89	89	89
Facing (330 cc Can)	7	5	5	5
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	595x510x870	435x500x1833	435x460x2013	435x529x1910
W x D x H (mm) With Packaging	645x670x1005	500x560x1990	475x540x2050	470x555x2035
Weight Without Packaging (kg)	42	70	64	64
Weight With Packaging (kg)	52	76	70	70
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	54	44	48	50
Containers 40'	108	96	100	105
Containers 40' HC	108	96	100	105
13.6 Truck	126	108	128	124

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 220 DTK Premium



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



USS 220 DTK BK



USS 220 DTKL

GENERAL CHARACTERISTICS	USS 220 DTK BK	USS 220 DTK Premium	USS 220 DTK	USS 220 DTKL
Available Energy Class Options*	D	C/D	E	E
Gross Volume (L)	227	227	227	227
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic	Mechanic
Number of Shelves**	3	3	3	3
Can Capacity (330 ml)	231	231	231	231
Can Capacity (500 ml)	168	168	168	168
PET Bottle Beverage Capacity (500 ml)	133	133	133	133
Facing (330 cc Can)	7	7	7	7
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	595x640x1310	595x665x1438	595x640x1310	595x640x1435
W x D x H (mm) With Packaging	670x710x1400	680x700x1600	670x710x1400	670x710x1620
Weight Without Packaging (kg)	52	58	64	61
Weight With Packaging (kg)	58	65	71	68
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	24	24	24	24
Containers 40'	54	51	54	54
Containers 40' HC	54	51	54	54
13.6 Truck	60	60	60	60

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 275 DTK Premium



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 275 DTK



USS 275 DTKL

GENERAL CHARACTERISTICS	USS 275 DTK	USS 275 DTKL	USS 275 DTK Premium
Available Energy Class Options*	D/B	B/C/F	D
Gross Volume (L)	312	312	312
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic
Number of Shelves**	5	5	5
Can Capacity (330 ml)	324	324	324
Can Capacity (500 ml)	180	180	180
PET Bottle Beverage Capacity (500 ml)	180	180	180
Facing (330 cc Can)	6	6	6
DIMENSIONS			
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	500x640x1840	500x640x2013	593x603x1833
W x D x H (mm) With Packaging	530x670x2050	530x670x2050	640x640x1970
Weight Without Packaging (kg)	85	76	85
Weight With Packaging (kg)	97	83	97
LOADING CAPACITY			
The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	37	37	27
Containers 40'	75	75	54
Containers 40' HC	75	75	54
13.6 Truck	90	90	63

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 300 DTK BK



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 300 DTKL



USS 300 DTK Premium

GENERAL CHARACTERISTICS	USS 300 DTK BK	USS 300 DTK	USS 300 DTKL	USS 300 DTK Premium
Available Energy Class Options*	D	B/C/D	C/D	B/C/E
Gross Volume (L)	305	305	305	305
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic	Mechanic
Number of Shelves**	4	4	4	4
Can Capacity (330 ml)	301	301	301	301
Can Capacity (500 ml)	203	203	203	203
PET Bottle Beverage Capacity (500 ml)	168	168	168	168
Facing (330 cc Can)	7	7	7	7
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	595x600x1640	595x640x1640	595x640x1780	595x665x1720
W x D x H (mm) With Packaging	670x710x1810	670x710x1810	670x710x1950	670x710x1820
Weight Without Packaging (kg)	59	68	74	68
Weight With Packaging (kg)	65	74	80	74
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	24	24	24	24
Containers 40'	54	54	54	54
Containers 40' HC	54	54	54	54
13.6 Truck	60	60	60	60

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 374 DTK



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 374 DTK BK



USS 374 DTK Premium

GENERAL CHARACTERISTICS	USS 374 DTK BK	USS 374 DTK Premium	USS 374 DTK	USS 374 DTKE
Available Energy Class Options*	D	B/C	B/C/D	D
Gross Volume (L)	358	358	358	358
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic	Mechanic
Number of Shelves**	5	5	5	5
Can Capacity (330 ml)	357	357	357	357
Can Capacity (500 ml)	231	231	231	231
PET Bottle Beverage Capacity (500 ml)	174	174	174	174
Facing (330 cc Can)	7	7	7	7
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	595x640x1840	595x665x1920	595x640x1840	595x600x1840
W x D x H (mm) With Packaging	670x710x1920	670x710x2080	670x710x1920	670x710x1920
Weight Without Packaging (kg)	66	74	74	74
Weight With Packaging (kg)	72	81	81	81
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	24	24	24	24
Containers 40'	54	54	54	54
Containers 40' HC	54	54	54	54
13.6 Truck	60	60	60	60

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 374 DTKL



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 374 DTKLB



USS 374 DTKLE

GENERAL CHARACTERISTICS	USS 374 DTKL	USS 374 DTKLB	USS 374 DTKLE
Available Energy Class Options*	B/C/F	D	D
Gross Volume (L)	358	372	358
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic
Number of Shelves**	5	5	5
Can Capacity (330 ml)	357	357	357
Can Capacity (500 ml)	231	231	231
PET Bottle Beverage Capacity (500 ml)	174	174	174
Facing (330 cc Can)	7	7	7
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	595x640x1980	595x640x1980	595x620x2015
W x D x H (mm) With Packaging	670x710x2150	670x710x2060	670x710x2150
Weight Without Packaging (kg)	78	83	78
Weight With Packaging (kg)	85	90	85
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	24	24	24
Containers 40'	54	54	54
Containers 40' HC	54	54	54
13.6 Truck	60	60	60

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 400 DTK



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 420 DTK



USS 440 DTKL

GENERAL CHARACTERISTICS	USS 400 DTK	USS 420 DTK	USS 420 DTK P	USS 440 DTKL
Available Energy Class Options*	D	B/C/D/E/F	C	F
Gross Volume (L)	399	441	416	469
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	R600a
Control Type	Mechanic	Mechanic	Electronic	Static
Number of Shelves**	5	5	5	5
Can Capacity (330 ml)	441	385	385	XXXXXXXX
Can Capacity (500 ml)	308	245	245	XXXXXXXX
PET Bottle Beverage Capacity (500 ml)	238	210	210	XXXXXXXX
Facing (330 cc Can)	7	7	7	XXXXXXXX
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	595x600x1990	595x670x2018	595x670x2018	585x495x1515
W x D x H (mm) With Packaging	665x715x2150	630x680x2190	630x680x2190	680x655x2096
Weight Without Packaging (kg)	84	98	86	XXXXXXXX
Weight With Packaging (kg)	91	108,5	97	XXXXXXXX
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	24	27	27	XXXXXXXX
Containers 40'	54	57	57	XXXXXXXX
Containers 40' HC	54	57	57	XXXXXXXX
13.6 Truck	60	63	63	XXXXXXXX

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 500 DTK



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 500 DTKL

GENERAL CHARACTERISTICS	USS 500 DTK	USS 500 DTKL
Available Energy Class Options*	B/C	B/C
Gross Volume (L)	513	493
Climate Class	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
Control Type	Electronic	Electronic
Number of Shelves**	5	5
Can Capacity (330 ml)	528	528
Can Capacity (500 ml)	384	384
PET Bottle Beverage Capacity (500 ml)	324	324
Facing (330 cc Can)	8	8
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	680x690x2120	680x655x2090
W x D x H (mm) With Packaging	760x710x2230	760x705x2207
Weight Without Packaging (kg)	107	115
Weight With Packaging (kg)	117	124
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20°	24	24
Containers 40°	48	51
Containers 40° HC	48	51
13.6 Truck	57	57

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.

NOVA

MORE VISIBILITY



LED illumination on both the inner and outer door frame

BRAND PRESENCE



Create a distinctive brand identity with your preferred aluminum frame color.

PREMIUM DURABILITY



The aluminum profile surrounding the illuminated gasket delivers both durability and premium aesthetics.

DOOR AD SPACE




Highlight your brand and attract more attention.

CHOOSE YOUR COLOR



Adapts to your brand and store with interior and exterior surface options.

SHELF PROFILES

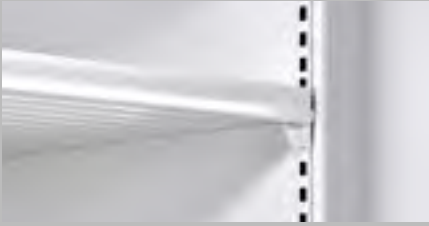

Securely holds the shelves in place and prevents slipping. Available in your preferred color.

CLASS C ENERGY



Features a C-class energy efficiency rating.

REFINED FINISH



The stepped base design enhances the premium appearance while providing a clean and refined finish.



USS 1200 D2K HV UC00L NOVA R23 CC2 K4

GENERAL CHARACTERISTICS	USS 1200 D2K HV UC00L NOVA R23 CC2 K4
Available Energy Class Options	C
Gross Volume (L)	1233
Climate Class	CC2
Operating Temperature Range (°C)	+1/+9
Voltage/Frequency (V/Hz)	230/50
Refrigerant Gas	R290
Control Type	Electronic
Number of Shelves	14
Can Capacity (330 ml)	1280
Can Capacity (500 ml)	768
PET Bottle Beverage Capacity (500 ml)	608
Facing (330 cc Can)	16
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.
W x D x H (mm) Without Packaging	1200x788x2137
W x D x H (mm) With Packaging	1235x755x2275
Weight Without Packaging (kg)	202
Weight With Packaging (kg)	214
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.
Containers 20"	-
Containers 40"	-
Containers 40" HC	-
13.6 Truck	33

UGUR Bottle Coolers

UCOOL Series Page 18

Single-Door Bottle Coolers Page 48

→ **Multi-Door Bottle Coolers** **Page 70**

Sliding-Door Bottle Coolers Page 82





USS 374 D2K



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 374 D2KL

GENERAL CHARACTERISTICS	USS 374 D2K	USS 374 D2KL
Available Energy Class Options*	E	D
Gross Volume (L)	358	358
Climate Class	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
Control Type	Mechanic	Mechanic
Number of Shelves**	5	5
Can Capacity (330 ml)	357	357
Can Capacity (500 ml)	231	231
PET Bottle Beverage Capacity (500 ml)	160	160
Facing (330 cc Can)	7	7
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	595x640x1840	595x640x1980
W x D x H (mm) With Packaging	670x710x1920	670x710x2060
Weight Without Packaging (kg)	77	79
Weight With Packaging (kg)	86,3	86
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20"	24	24
Containers 40"	54	54
Containers 40" HC	54	54
13.6 Truck	60	60

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 748 D2KL



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 890 D2K



USS 890 D2KL

GENERAL CHARACTERISTICS	USS 748 D2KL	USS 890 D2K	USS 890 D2KL
Available Energy Class Options*	F	F	C/F
Gross Volume (L)	716	837	808
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Mechanic	Electronic	Mechanic
Number of Shelves**	10	4	4
Can Capacity (330 ml)	714	960	948
Can Capacity (500 ml)	462	480	231
PET Bottle Beverage Capacity (500 ml)	320	480	468
Facing (330 cc Can)	14	12	12
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1200x640x1980	890x769x2004	890x792x1990
W x D x H (mm) With Packaging	1270x690x2150	950x840x2140	950x840x2140
Weight Without Packaging (kg)	154	145	154
Weight With Packaging (kg)	166	165	168
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20"	13	14	14
Containers 40"	27	28	28
Containers 40" HC	27	28	28
13.6 Truck	31	32	32

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 1000 D2KL



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



USS 1100 D2KL



USS 1200 D2K

GENERAL CHARACTERISTICS	USS 1000 D2KL	USS 1100 D2KL	USS 1200 D2K	USS 1200 D2KL
Available Energy Class Options*	B/C/F	F	B/C/F	B/C/F
Gross Volume (L)	882	1114	1126	1082
Climate Class	CC2	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic	Mechanic
Number of Shelves**	5	5	5	5
Can Capacity (330 ml)	910	1226	1008	1120
Can Capacity (500 ml)	546	765	640	672
PET Bottle Beverage Capacity (500 ml)	455	600	624	560
Facing (330 cc Can)	13	15	16	16
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	1000x792x1990	1100x872x1990	1200x791x2007	1200x792x1990
W x D x H (mm) With Packaging	1040x840x2160	1160x940x2160	1260x840x2140	1260x840x2140
Weight Without Packaging (kg)	158	177	164	178
Weight With Packaging (kg)	169	192	190	193
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	14	12	11	11
Containers 40'	28	26	23	23
Containers 40' HC	28	26	23	23
13.6 Truck	32	28	26	26

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 1500 D2K



LED lights (optional alternatives)



Fan assisted cooling



Customizable branding area for your brand



Adjustable feet



Reversible glass door (optional)



Electronic control (optional)



Adjustable shelves



Lock (optional)



USS 1600 D2K



USS 1600 D2KL

GENERAL CHARACTERISTICS	USS 1500 D2K	USS 1600 D2K	USS 1600 D2KL
Available Energy Class Options*	B/C/D	E/F	E
Gross Volume (L)	1215	1323	1287
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Mechanic	Electronic	Electronic
Number of Shelves**	8	10	10
Can Capacity (330 ml)	1224	1392	1386
Can Capacity (500 ml)	828	996	924
PET Bottle Beverage Capacity (500 ml)	650	696	805
Facing (330 cc Can)	18	11	22
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1500x720x2044	1600x750x2090	1600x750x2090
W x D x H (mm) With Packaging	1555x750x2065	1675x805x2124	1675x805x2124
Weight Without Packaging (kg)	206	224	224
Weight With Packaging (kg)	211	229	229
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20"	10	7	7
Containers 40"	23	14	14
Containers 40" HC	23	14	14
13.6 Truck	26	24	24

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 1500 D3K



LED lights (optional alternatives)



Fan assisted cooling



Customizable branding area for your brand



Adjustable feet



Reversible glass door (optional)



Electronic control (optional)



Adjustable shelves



Lock (optional)



USS 1600 D3KL

GENERAL CHARACTERISTICS	USS 1500 D3K	USS 1600 D3KL
Available Energy Class Options*	B/C/D	E
Gross Volume (L)	1178	1280
Climate Class	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
Control Type	Mechanic	Electronic
Number of Shelves**	12	15
Can Capacity (330 ml)	1236	1386
Can Capacity (500 ml)	834	924
PET Bottle Beverage Capacity (500 ml)	614	805
Facing (330 cc Can)	18	22
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	1500x720x2044	1600x750x2073
W x D x H (mm) With Packaging	1555x750x2065	1675x805x2124
Weight Without Packaging (kg)	214	224
Weight With Packaging (kg)	219	229
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20"	10	7
Containers 40"	23	15
Containers 40" HC	23	15
13.6 Truck	26	17

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



Bottle Coolers

UCOOL Series Page 18

Single-Door Bottle Coolers Page 48

Multi-Door Bottle Coolers Page 70

→ **Sliding-Door Bottle Coolers Page 82**





USS 900 DSCL



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



Sliding glass door



USS 1000 DSC



USS 1000 DSCL

GENERAL CHARACTERISTICS	USS 900 DSCL	USS 1000 DSC	USS 1000 DSCL
Available Energy Class Options*	C/F	F	F
Gross Volume (L)	840	915	795
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic
Facing (330 cc Can)	12	13	13
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	900x742x2102	1000x735x1990	1000x742x1990
W x D x H (mm) With Packaging	945x775x2260	1040x780x2125	1040x790x2160
Weight Without Packaging (kg)	170	162	150
Weight With Packaging (kg)	184	175	160
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	18	16	14
Containers 40'	37	34	30
Containers 40' HC	37	34	30
13.6 Truck	42	39	39

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.



USS 1100 DSCL



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Fan assisted cooling



glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



Sliding glass door



USS 1200 DSC



USS 1200 DSCL

GENERAL CHARACTERISTICS	USS 1100 DSCL	USS 1200 DSC	USS 1200 DSCL
Available Energy Class Options*	F	F	C/F
Gross Volume (L)	1015	1122	967
Climate Class	CC2	CC2	CC2
Operating Temperature Range (°C)	+1/+9	+1/+9	+1/+9
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Control Type	Mechanic	Mechanic	Mechanic
Number of Shelves**	5	5	5
Can Capacity (330 ml)	1170	1008	1120
Can Capacity (500 ml)	720	640	672
PET Bottle Beverage Capacity (500 ml)	600	624	560
Facing (330 cc Can)	15	16	16
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1100x822x1990	1200x735x1990	1200x742x1990
W x D x H (mm) With Packaging	1160x870x2160	1260x790x2160	1260x790x2160
Weight Without Packaging (kg)	171	174	164
Weight With Packaging (kg)	186	188,5	178
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	12	11	11
Containers 40'	26	24	24
Containers 40' HC	26	24	24
13.6 Truck	30	31	31

*The energy class option specified in the technical tables applies to standard products. Different Available Energy Class Options are available for different configurations of each model. For detailed information, please contact your sales representative.

**The number of shelves specified in the technical tables applies to standard products. The number of shelves can be increased upon request.

 UGUR
Freezers

→ Chest Freezers 88

Ice Cream Conservators 100

Upright Freezers 120





UDD 165 T D/S R63



Freezer/Cooler



Quick Installation



Wheels (optional)



UDD 265 T D/S R63



UDD 365 T D/S R63

Block Covered
Storage Cabinet



595 mm

550 mm



695 mm

734 mm



695 mm

984 mm

GENERAL CHARACTERISTICS	UDD 165 T D/S R63	UDD 265 T D/S R63	UDD 365 T D/S R63
Available Energy Class Options*	C	C	C
Gross Volume (L)	124	191	284
Climate Class	C/C1	C/C1	C/C1
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	550x595x895	734x695x895	984x695x895
W x D x H (mm) With Packaging	600x650x970	795x720x975	1045x720x975
Weight Without Packaging (kg)	34	40	47
Weight With Packaging (kg)	39	43	50
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	54	46	32
Containers 40'	120	94	66
13.6 Truck	168	108	78



UDD 465 T D/S R63



Freezer/Cooler



Quick Installation



Wheels (optional)



UDD 565 T D/S R63




UDD 665 T D/S R63


Block Covered
Storage Cabinet



1284 mm



1504 mm



1804 mm

GENERAL CHARACTERISTICS	UDD 465 T D/S	UDD 565 T D/S	UDD 665 T D/S
Available Energy Class Options*	C	C	C
Gross Volume (L)	387	469	565
Climate Class	C/C1	C / C1	C/C1
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	1284x695x895	1504x695x895	1804x695x895
W x D x H (mm) With Packaging	1345x720x975	1565x720x975	1865x720x975
Weight Without Packaging (kg)	55	61	68
Weight With Packaging (kg)	59	66	73
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	24	22	18
Containers 40'	50	46	38
13.6 Truck	60	52	42



QUALITY STARTS WITHIN.

The interior surface is fully chrome-plated.
Hygienic, durable, and easy to clean.

100%
CHROME
INTERIOR

UDD 565 T D/S KRM R63



HYGIENIC
Smooth chrome surface helps
prevent bacterial buildup.



EASY TO CLEAN
Stain-resistant surface
wipes clean with ease.



DURABLE
Highly resistant to corrosion
for long-lasting performance.



UDD 465 T D/S KRM R63



UDD 665 T D/S KRM R63

Block Covered Storage Cabinet



GENERAL CHARACTERISTICS	UDD 465 T D/S KRM R63	UDD 565 T D/S KRM R63	UDD 665 T D/S KRM R63
Available Energy Class Options	C	C	C
Gross Volume (L)	387	469	565
Climate Class	C/C1	C/C1	C/C1
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1284x695x895	1504x695x895	1804x695x895
W x D x H (mm) With Packaging	1345x720x975	1565x720x975	1865x730x995
Weight Without Packaging (kg)	55	61	68
Weight With Packaging (kg)	59	66	73
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	24	22	18
Containers 40'	50	46	38
13.6 Truck	60	52	42



Freezer/Cooler



Quick Installation



Wheels (optional)



UDD 500 BK



Quick Installation



Wheels (optional)







UDD 560 BK



UDD 660 B2K

Block Covered Storage Cabinet



GENERAL CHARACTERISTICS	UDD 500 BK	UDD 560 BK	UDD 600 B2K	UDD 660 B2K
Available Energy Class Options	D	C	D	C
Gross Volume (L)	484	469	667	566
Climate Class	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	1554x725x834	1504x695x895	2055x725x834	1804x695x895
W x D x H (mm) With Packaging	1605x760x890	1590x730x995	2110x750x890	1890x730x995
Weight Without Packaging (kg)	76	61	97,5	68
Weight With Packaging (kg)	94	66	118,5	73
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	20	22	16	18
Containers 40'	44	46	32	38
Containers 40' HC	66	46	48	38
13.6 Truck	75	52	57	42



COOLING BEYOND LIMITS.

Meet Uğur Super Freezers.

While standard freezers reach temperatures down to -20°C, Uğur Super Freezers stand out with superior performance, reaching -45°C.

-45°C



Standard Freezers

UĞUR Super Freezers



MAXIMUM
-20°C

VS



MAXIMUM
-45°C







USD 2045 BK



USD 4045 BK

Block Covered Storage Cabinet



GENERAL CHARACTERISTICS	USD 1045 BK	USD 2045 BK	USD 3045 BK	USD 4045 BK
Gross Volume (L)	157	239	335	405
Climate Class	C/C1	C/C1	CL 3	C/C1
Operating Temperature Range (°C)	-40/-45	-40/-45	-40/-45	-40/-45
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	734x700x890	984x700x890	1284x700x890	1504x700x890
W x D x H (mm) With Packaging	770x700x960	1020x700x960	1320x700x960	1540x700x960
Weight Without Packaging (kg)	45,5	51	61	68
Weight With Packaging (kg)	48	53	63	71
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	48	34	24	22
Containers 40'	102	70	54	48
Containers 40' HC	-	-	54	-
13.6 Truck	114	78	60	54



Quick Installation



Wheels (optional)



Super Freezer

 UGUR
Freezers

Chest Freezers 88

→ **Ice Cream Conservators 100**

Upright Freezers 120





UDD 200 SC



Basket (optional)



Quick installation



Wheels (optional)



Sliding Glass






UDD 300 SC



UDD 400 SC

Flat Sliding Glass
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 100 SC	UDD 200 SC	UDD 300 SC	UDD 400 SC
Available Energy Class Options	D	C/D	C/D	C/D
Gross Volume (L)	113	188	291	395
Climate Class	B	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	568x568x897	724x635x892	1014x635x892	1304x635x892
W x D x H (mm) With Packaging	600x600x970	800x750x910	1100x750x910	1400x750x910
Weight Without Packaging (kg)	35	47	47	65
Weight With Packaging (kg)	47	58	58	80
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	48	42	30	24
Containers 40'	108	94	64	50
Containers 40' HC	108	138	96	75
13.6 Truck	120	162	108	81



UDD 500 SC



Basket (optional)



Quick installation



Wheels (optional)



Sliding Glass






UDD 550 SC



UDD 600 SC

Flat Sliding Glass
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 500 SC	UDD 550 SC	UDD 600 SC
Available Energy Class Options	D	D	C/D
Gross Volume (L)	484	555	662
Climate Class	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1554x635x892	1754x635x892	2059x635x892
W x D x H (mm) With Packaging	1640x750x910	1845x750x910	2150x750x910
Weight Without Packaging (kg)	85	96	99
Weight With Packaging (kg)	101	114	120
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20"	20	18	18
Containers 40"	42	38	38
Containers 40" HC	63	38	57
13.6 Truck	78	57	63



UDD 205 SC



Basket (optional)



Quick installation



Wheels (optional)



Sliding Glass








UDD 305 SC



UDD 505 SC

Flat Sliding Glass
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 205 SC	UDD 305 SC	UDD 405 SC	UDD 505 SC	UDD 605 SC
Available Energy Class Options	C/D	C/D	C/D	C/D	D
Gross Volume (L)	206	318	430	526	719
Climate Class	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
W x D x H (mm) Without Packaging	724x635x950	1014x635x950	1304x635x950	1554x635x950	2059x635x950
W x D x H (mm) With Packaging	800x750x910	1100x750x910	1330x750x910	1640x750x910	2150x750x910
Weight Without Packaging (kg)	47	56	65	85	99
Weight With Packaging (kg)	58	70	80	101	120
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
Containers 20"	42	30	24	20	18
Containers 40"	94	64	50	42	38
Containers 40" HC	94	64	50	42	38
13.6 Truck	162	108	81	78	63



UDD 100 SCB



Basket (optional)



Quick installation



Wheels (optional)



Curved Sliding Glass




UDD 200 SCB



UDD 500 SCB

Curved Sliding
Glass Storage
Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCB	UDD 200 SCB	UDD 300 SCB	UDD 400 SCB	UDD 500 SCB	UDD 550 SCB
Available Energy Class Options	D	D	D	D	D	D
Gross Volume (L)	114	197	304	411	504	578
Climate Class	B	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
W x D x H (mm) Without Packaging	572x572x905	724x635x892	1014x635x892	1304x635x892	1554x635x892	1754x635x892
W x D x H (mm) With Packaging	680x665x1000	800x750x960	1100x750x960	1400x750x960	1640x750x960	1845x750x960
Weight Without Packaging (kg)	35	47	56	65	85	96
Weight With Packaging (kg)	43	58	70	80	101	114
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
Containers 20'	48	42	30	24	20	18
Containers 40'	108	94	64	50	42	38
Containers 40' HC	108	138	64	75	63	57
13.6 Truck	120	162	72	81	78	66



UDD 300 SCE



Basket (optional)



Quick installation



Wheels (optional)



Inclined Sliding Glass




UDD 400 SCE



UDD 500 SCE

Inclined Sliding
Glass Enclosure
Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCE	UDD 200 SCE	UDD 300 SCE	UDD 400 SCE	UDD 500 SCE	UDD 550 SCE
Available Energy Class Options	D	D	D	D	D	D
Gross Volume (L)	87	183	285	386	473	543
Climate Class	B	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
W x D x H (mm) Without Packaging	572x572x905	724x620x950/829	1014x620x950/829	1304x620x950/829	1554x620x950/829	1754x620x950/829
W x D x H (mm) With Packaging	680x665x1000	740x680x910	1040x680x910	1330x680x910	1585x680x910	1785x680x910
Weight Without Packaging (kg)	41	45	56	65	79	96
Weight With Packaging (kg)	49	57	70	81	96	114
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
Containers 20'	48	48	34	24	22	18
Containers 40'	108	102	70	54	48	38
Containers 40' HC	108	102	70	54	48	38
13.6 Truck	120	120	92	60	56	44



UDD 200 SCEB



Basket (optional)



Quick installation



Wheels (optional)



Inclined Curved Sliding Glass




UDD 300 SCEB



UDD 400 SCEB

Inclined Curved
Glass Storage
Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCEB	UDD 200 SCEB	UDD 300 SCEB	UDD 400 SCEB	UDD 500 SCEB	UDD 550 SCEB
Available Energy Class Options	D	D	D	D	D	D
Gross Volume (L)	105	191	295	400	490	562
Climate Class	B	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
W x D x H (mm) Without Packaging	572x572x905	724x620x950/829	1014x620x950/829	1304x620x950/829	1554x620x950/829	1754x620x950/829
W x D x H (mm) With Packaging	680x665x1000	740x680x910	1040x680x910	1330x680x910	1585x680x910	1785x680x910
Weight Without Packaging (kg)	41	45	56	65	79	96
Weight With Packaging (kg)	49	57	70	81	96	114
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.					
Containers 20'	48	48	34	24	22	18
Containers 40'	108	102	70	54	48	38
Containers 40' HC	108	102	70	54	48	38
13.6 Truck	120	120	92	60	56	44



UDD 200 SCN

- 
Basket (optional)
- 
Quick installation
- 
Wheels (optional)
- 
Sliding Glass







UDD 400 SCN



UDD 500 SCN

Flat Sliding Glass
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 200 SCN	UDD 300 SCN	UDD 400 SCN	UDD 500 SCN
Available Energy Class Options	D	D	C/D	C/D
Gross Volume (L)	185	286	388	476
Climate Class	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	740x650x890	1030x650x890	1320x650x890	1570x650x890
W x D x H (mm) With Packaging	795x725x885	1085x725x885	1375x725x885	1625x725x885
Weight Without Packaging (kg)	52	62	72	110
Weight With Packaging (kg)	63	76	87	122
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	46	32	24	22
Containers 40'	94	66	50	46
Containers 40' HC	141	99	72	69
13.6 Truck	162	111	81	78



UDD 100 SCEBN



Basket (optional)



Quick installation



Wheels (optional)



Inclined Curved Sliding Glass






UDD 200 SCEBN



UDD 300 SCEBN

Inclined Curved Sliding Glass Storage Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCEBN	UDD 200 SCEBN	UDD 300 SCEBN
Available Energy Class Options	D	C/D	C/D
Gross Volume (L)	164	187	289
Climate Class	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	645x650x940/807	740x650x920/793	1030x650x920/793
W x D x H (mm) With Packaging	700x700x1000	795x725x885	1085x725x885
Weight Without Packaging (kg)	47	51	62
Weight With Packaging (kg)	56	59	76
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	48	46	32
Containers 40'	102	94	66
Containers 40' HC	102	141	99
13.6 Truck	114	162	111



UDD 400 SCEBN



Basket (optional)



Quick installation



Wheels (optional)





Inclined Curved Sliding Glass



UDD 500 SCEBN

Inclined Sliding
Glass Storage Cabinet



GENERAL CHARACTERISTICS	UDD 400 SCEBN	UDD 500 SCEBN
Available Energy Class Options	D	D
Gross Volume (L)	392	480
Climate Class	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	1320x650x920/793	1570x650x920/793
W x D x H (mm) With Packaging	1375x725x885	1625x725x885
Weight Without Packaging (kg)	72	81
Weight With Packaging (kg)	87	89
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20'	24	22
Containers 40'	50	46
Containers 40' HC	72	69
13.6 Truck	81	78

UGUR Freezers

Chest Freezers	88
Ice Cream Conservators	100
→ Upright Freezers	120





UDD 45 DTK



Wheels (Optional)



Quick installation



LED lights (optional alternatives)



Reversible glass door (optional)



Electronic control (optional)



Lock (optional)



Customizable branding area for your brand



UDD 65 DTKL



UDD 175 DTKL

GENERAL CHARACTERISTICS	UDD 45 DTK	UDD 65 DTKL	UDD 175 DTKL
Available Energy Class Options	B	A	C/E
Gross Volume (L)	46,5	66	190
Climate Class	4	4	5/L2 - 7/L1
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	570x505x487	570x512x690	435x491x2016
W x D x H (mm) With Packaging	630x570x570	630x585x760	475x540x2050
Weight Without Packaging (kg)	31,5	38,5	70
Weight With Packaging (kg)	35,5	40	76
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	144	108	48
Containers 40'	304	228	100
Containers 40' HC	304	228	100
13.6 Truck	336	252	128



UDD 370 DTK



Wheels (optional)



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Glass door



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



UDD 370 DTKL



UDD 370 DTK BK

GENERAL CHARACTERISTICS	UDD 370 DTK	UDD 370 DTKL	UDD 370 DTK BK
Available Energy Class Options	C/D	C/D	B
Gross Volume (L)	328	328	329
Climate Class	4	4	4
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	595x640x1840	595x640x1980	595x640x1840
W x D x H (mm) With Packaging	630x670x1920	630x670x2060	630x670x1920
Weight Without Packaging (kg)	91	96	69,8
Weight With Packaging (kg)	101,5	106	79,5
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	27	27	27
Containers 40'	57	57	57
Containers 40' HC	57	57	57
13.6 Truck	80	80	80



UDD 440 DTKL



Wheels (optional)



Quick installation



LED lights (optional alternatives)



Adjustable feet



Adjustable shelves



Reversible glass door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



UDD 440 DTKLB



UDD 440 DTKLE NF

GENERAL CHARACTERISTICS	UDD 440 DTKL	UDD 440 DTKLB	UDD 440 DTKLE NF
Available Energy Class Options	E	D	C
Gross Volume (L)	496	526	544
Climate Class	4	4	4
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	680x655x2102	680x655x2122	680x760x2149
W x D x H (mm) With Packaging	760x710x2207	760x710x2207	745x785x2275
Weight Without Packaging (kg)	114	109	125
Weight With Packaging (kg)	123	120	148
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	24	24	21
Containers 40'	51	51	45
Containers 40' HC	51	51	45
13.6 Truck	57	57	54



USD 6935 DTKL BK NF



Super Freezer



No-Frost



Wheels (optional)



Quick installation



LED lights (optional alternatives)



Adjustable feet & Adjustable shelves



Reversible door (optional)



Customizable branding area for your brand



Electronic control (optional)



Lock (optional)



UDD 690 DTKLE NF



UDD 690 DTKLE BK NF

GENERAL CHARACTERISTICS	USD 6935 DTKL BK NF	UDD 690 DTKLE NF	UDD 690 DTKLE BK NF
Available Energy Class Options	C	D	D
Gross Volume (L)	640	640	640
Climate Class	4	4	4
Operating Temperature Range (°C)	-18/-35	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	780x762x2150	780x761x2149	780x761x2149
W x D x H (mm) With Packaging	845x785x2275	845x785x2275	845x785x2275
Weight Without Packaging (kg)	115	142	117
Weight With Packaging (kg)	126	168	143
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	14	20	20
Containers 40'	30	42	42
Containers 40' HC	30	42	42
13.6 Truck	49	49	49



UDD 1240 D2K NF
HV UC00L



HV: High Visibility



UC00L: Perfect compatibility



No-Frost



Quick installation



LED inside the door



Customizable frame colors



Full Glass



Glass color of your choice



Lock



UDD 1600 D3KL NF

GENERAL CHARACTERISTICS	UDD 1240 D2K HV UC00L	UDD 1600 D3KL NF
Available Energy Class Options	E	D
Gross Volume (L)	1230	1280
Climate Class	7	4
Operating Temperature Range (°C)	-12/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may	
W x D x H (mm) Without Packaging	1240x785x2137	1600x762x2073
W x D x H (mm) With Packaging	1275x765x2275	1675x770x2150
Weight Without Packaging (kg)	202	272
Weight With Packaging (kg)	214	277
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may	
Containers 20'	-	7
Containers 40'	-	15
Containers 40' HC	23	15
13.6 Truck	26	17



Supermarket Solutions

Open Coolers 132

İzmir Series 140

Antalya Series 144

Marmaris Series 148

Aspen 150





UMD 180 AS



Customizable branding area for your brand



Double glass side panel



LED lights



Quick installation



Easy display



UMD 240 AS Premium



UMD 290 AS

GENERAL CHARACTERISTICS	UMD 180 AS	UMD 240 AS Premium	UMD 290 AS
Available Energy Class Options	D	E	D
Gross Volume (L)	189	273	304
Climate Class	3	3	3
Operating Temperature Range (°C)	-1/+5	-1/+5	-1/+5
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Automatic Defrost	Yes	Yes	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	590x712x1060	600x727x1422	500x560x1830
W x D x H (mm) With Packaging	675x800x1225	700x845x1620	520x640x1860
Weight Without Packaging (kg)	89	110	76,5
Weight With Packaging (kg)	121	147	84
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	23	21	40
Containers 40'	49	45	82
Containers 40' HC	98	45	82
13.6 Truck	114	54	99



UMD 68 KS



Customizable branding
area for your brand



Quick installation



LED lights



Easy display



UMD 68 KD



UMD 110 KS

GENERAL CHARACTERISTICS	UMD 68 KS	UMD 68 KD	UMD 110 KS
Available Energy Class Options	A	B	F
Gross Volume (L)	68	68	141
Climate Class	3	3	CC2
Operating Temperature Range (°C)	-1/+5	-18/-23	K1(-0/+7)
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	R600a
Automatic Defrost	No	No	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	505x505x837	505x505x838	660x460x970
W x D x H (mm) With Packaging	535x535x885	535x535x890	700x500x1125
Weight Without Packaging (kg)	32	32	30,5
Weight With Packaging (kg)	37	37	40,5
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	80	80	70
Containers 40'	176	176	150
Containers 40' HC	264	264	150
13.6 Truck	200	200	184



UMD 520 SCB HS



Customizable branding
area for your brand



Protective bumpers



Wheels (optional)



Quick installation



Easy display



UMD 200 HD

GENERAL CHARACTERISTICS	UMD 520 SCB HS	UMD 200 HS D/S	UMD 200 HS	UMD 200 HD
Available Energy Class Options	D	F	E	F
Gross Volume (L)	408	549	549	549
Climate Class	3	3	3	3
Operating Temperature Range (°C)	M(-1/+5)	-18/-23	-1/+5	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Automatic Defrost	Yes	Yes	Yes	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	1405x1210x1005	1015x1255x962	1015x1255x962	1015x1255x962
W x D x H (mm) With Packaging	1335x1170x1140	1040x1280x1010	1040x1280x1010	1040x1280x1010
Weight Without Packaging (kg)	133	128	128	128
Weight With Packaging (kg)	176	138	136	138
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	16	9	9	9
Containers 40'	36	20	20	20
Containers 40' HC	36	20	20	20
13.6 Truck	40	23	23	3

ISLAND FREEZERS **İZMİR**

Modular. Flexible. Powerful.

Customized island solutions with modular combinations of freezer cabinets in different capacities.

Possible
Combinations



Isolated



Inline



Back to back



In block



Island




**MODULAR
DESIGN**



**FLEXIBLE
CONFIGURATION**



**HIGH COOLING
PERFORMANCE**

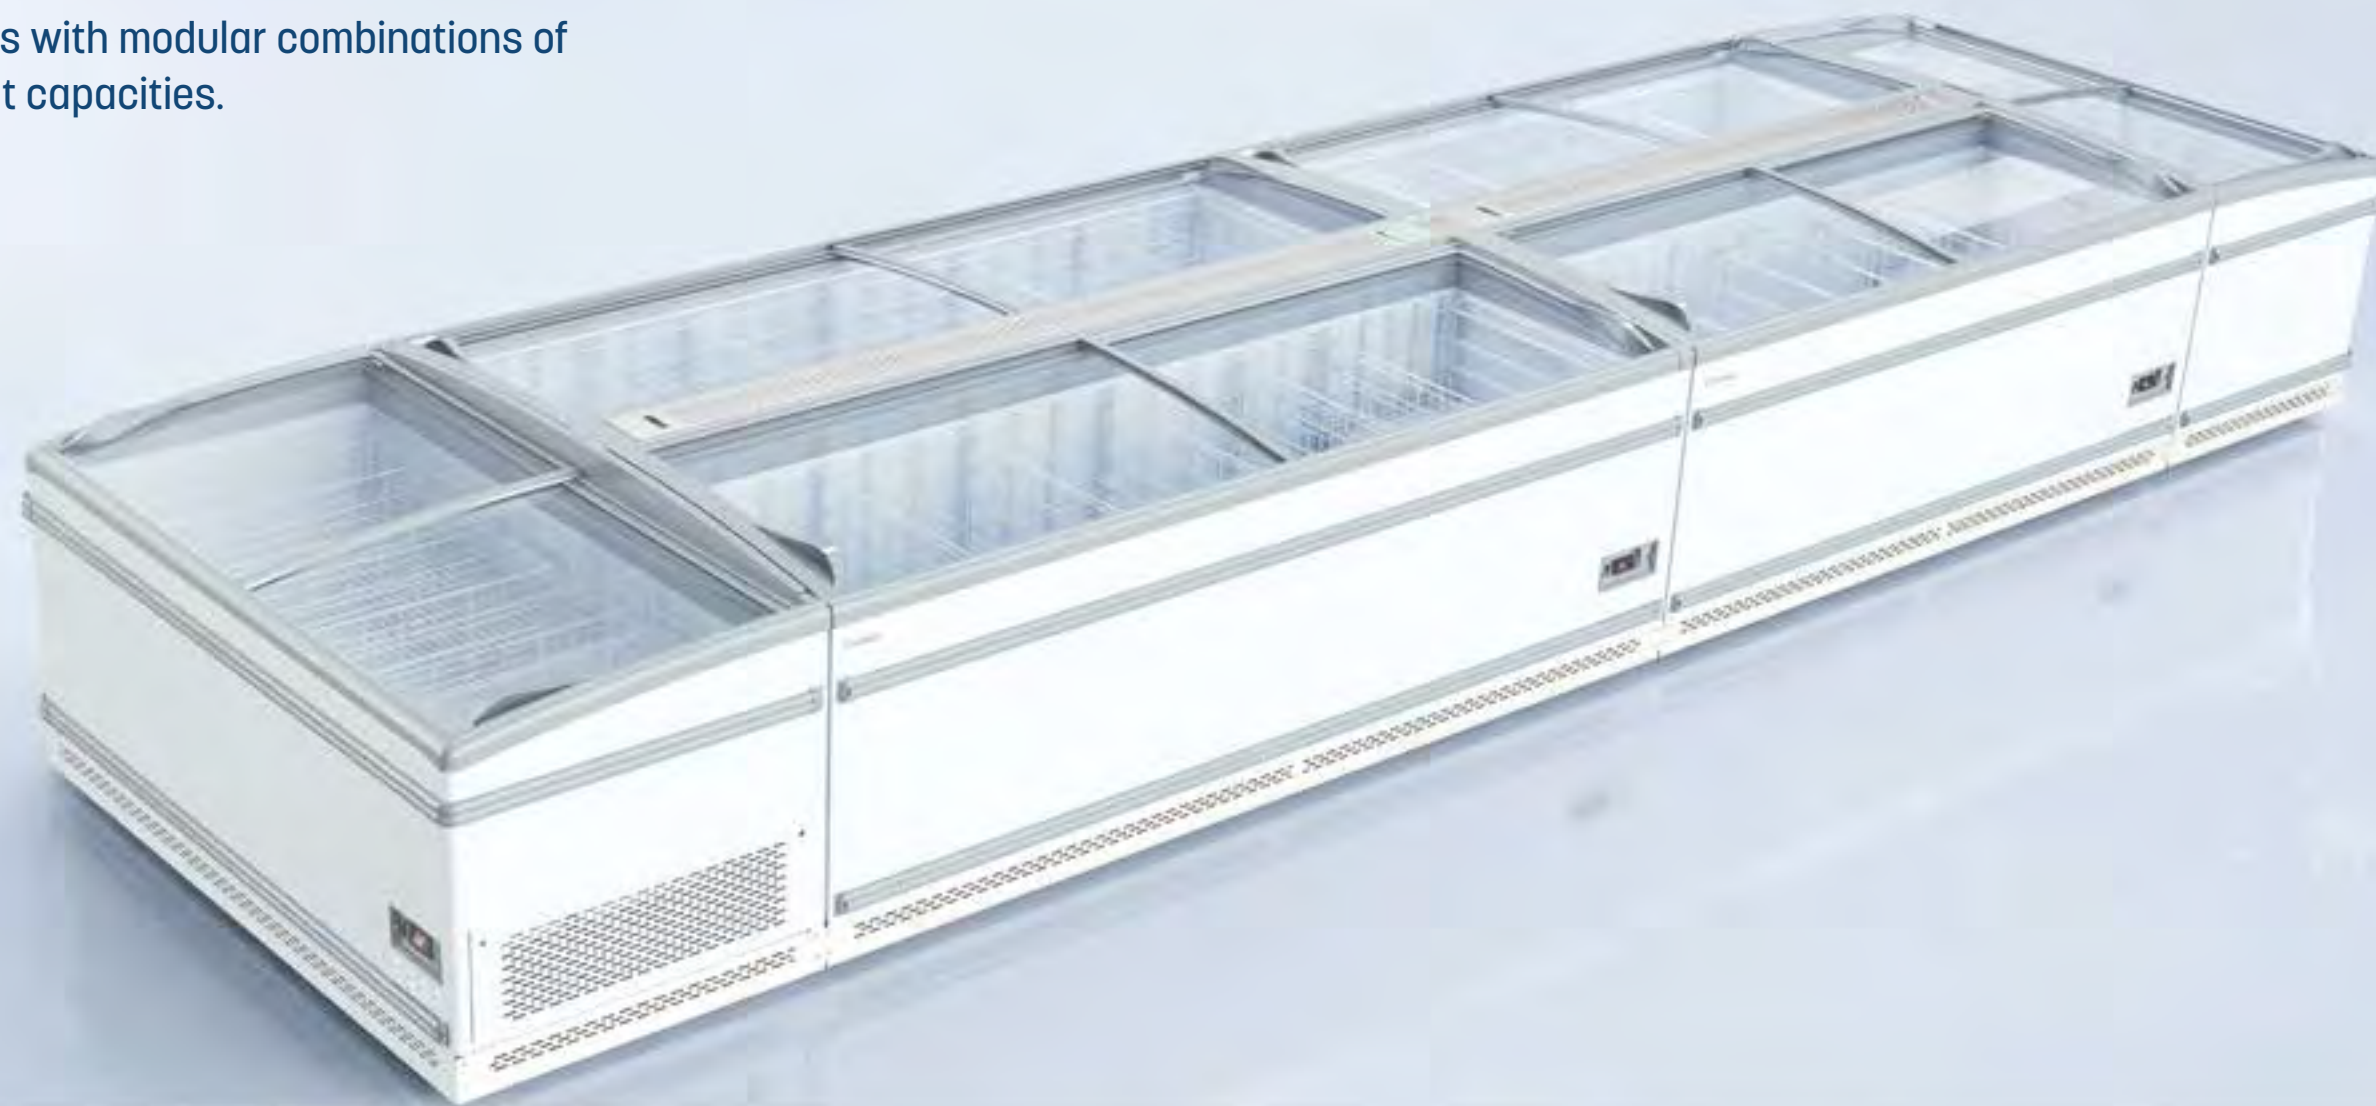

UMD 1850 GB D İZMİR

Start / End Unit
Length: 1856 mm
Net Capacity: 716 L
Temperature: -18 / -23 °C



UMD 2100 D İZMİR

Middle Unit
Length: 2106 mm
Net Capacity: 910 L
Temperature: -18 / -23 °C



UMD 2500 D İZMİR

Middle Unit
Length: 2506 mm
Net Capacity: 1106 L
Temperature: -18 / -23 °C



Scalable solutions tailored to
your store's needs



Efficient energy
consumption




Durable construction for
long-lasting performance



The **Izmir Island Concept** offers a highly flexible and modular solution, allowing configurations to be created using cabinets of different capacities and dimensions. Depending on each store's specific requirements, the cabinet models featured on this page can be combined in various configurations to create a tailored island solution.

Possible
Combinations



UMD 1450 D/S DF İZMİR*



UMD 2500 D/S DF İZMİR*



High performance supermarket freezer



Automatic defrost



Wheels (optional)



Variable speed control compressor

GENERAL CHARACTERISTICS	UMD 1450 D İZMİR	UMD 1450 D/S DF İZMİR*	UMD 1850 GB D İZMİR	UMD 1850 GB D/S DF İZMİR	UMD 1850 D İZMİR
Available Energy Class Options	C	C	C	D	C
Gross Volume (L)	592	591	716	715	787
Climate Class	3	3	3	3	3
Operating Temperature Range (°C)	-18/-23	-1/+5 // -18/-23	-18/-23	-1/+5 // -18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC
Automatic Defrost	No	Yes	No	Yes	No
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	1456x858x890	1456x858x890	1856x858x832	1856x858x832	1856x858x890
W x D x H (mm) With Packaging	1520x915x980	1520x915x980	1920x915x920	1920x915x920	1920x915x980
Weight Without Packaging (kg)	121	121	143	143	150
Weight With Packaging (kg)	139	139	158	158	165
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	12	12	12	12	12
Containers 40'	26	26	26	26	26
Containers 40' HC	26	26	26	26	26
13.6 Truck	44	44	28	28	28

*The Automatic Defrost feature is standard on D/S models and available as an option on D models.
Product Codes Abbreviations D: Freezer, S: Cooler, D/S: Freezer/Cooler, DF: Defrost, GB: Head Unit / Island Head

GENERAL CHARACTERISTICS	UMD 1850 D/S DF İZMİR*	UMD 2100 D İZMİR	UMD 2100 D/S DF İZMİR*	UMD 2500 D İZMİR	UMD 2500 D/S DF İZMİR*
Available Energy Class Options	D	C	C	C	C
Gross Volume (L)	786	910	908	1106	1104
Climate Class	3	3	3	3	3
Operating Temperature Range (°C)	-1/+5 // -18/-23	-18/-23	-1/+5 // -18/-23	-18/-23	-1/+5 // -18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC
Automatic Defrost	Yes	No	Yes	No	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
W x D x H (mm) Without Packaging	1856x858x890	2106x858x890	2106x858x890	2506x858x890	2506x858x890
W x D x H (mm) With Packaging	1920x915x980	2170x915x980	2170x915x980	2570x915x980	2570x915x980
Weight Without Packaging (kg)	150	163	163	200	200
Weight With Packaging (kg)	165	180	180	220	220
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.				
Containers 20'	12	12	12	8	8
Containers 40'	26	26	26	16	16
Containers 40' HC	26	26	26	16	16
13.6 Truck	28	28	28	20	20

*The Automatic Defrost feature is standard on D/S models and available as an option on D models.
Product Codes Abbreviations D: Freezer, S: Cooler, D/S: Freezer/Cooler, DF: Defrost, GB: Head Unit / Island Head

ISLAND FREEZERS

ANTALYA

Enhanced side glass design delivers maximum product visibility from every angle.

-  **MODULAR DESIGN**
-  **FLEXIBLE CONFIGURATION**
-  **HIGH COOLING PERFORMANCE**
-  **MAXIMUM VISIBILITY**

Possible
Combinations



Isolated



Inline



Back to back



In block



Island



UMD 1850 GB D ANTALYA

Start / End Unit
Length: 1856 mm
Net Capacity: 859 L
Temperature: -18 / -23 °C



UMD 2100 D ANTALYA

Middle Unit
Length: 2106 mm
Net Capacity: 1036 L
Temperature: -18 / -23 °C



UMD 2500 D ANTALYA

Middle Unit
Length: 2506 mm
Net Capacity: 1256 L
Temperature: -18 / -23 °C



Scalable solutions tailored to your store's needs



Efficient energy consumption




Durable construction for long-lasting performance



The **Antalya Island** Concept offers a highly flexible and modular solution, allowing configurations to be created using cabinets of different capacities and dimensions while ensuring **maximum product visibility**. Depending on each store's specific requirements, the cabinet models featured on this page can be combined in various configurations to create a tailored island solution with enhanced product presentation.

Possible
Combinations



UMD 1850 D ANTALYA



UMD 2500 D/S DF ANTALYA

-  High visibility via front
-  High performance supermarket freezer
-  Automatic defrost

GENERAL CHARACTERISTICS	UMD 1850 GB D ANTALYA	UMD 1850 GB D/S DF ANTALYA*	UMD 1850 D ANTALYA	UMD 1850 D/S DF ANTALYA*
Available Energy Class Options*	D	D	D	D
Gross Volume (L)	859	858	898	898
Climate Class	3	3	3	3
Operating Temperature Range (°C)	-18/-23	-1/+5 // -18/-23	-18/-23	-1/+5 // -18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Automatic Defrost	No	Yes	No	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	1856x879x925	1856x879x925	1856x879x925	1856x879x925
W x D x H (mm) With Packaging	1920x915x1000	1920x915x1000	1920x915x1050	1920x915x1050
Weight Without Packaging (kg)	138	138	160	165
Weight With Packaging (kg)	160	160	175	180
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	12	12	12	12
Containers 40'	26	26	26	26
Containers 40' HC	26	26	26	26
13.6 Truck	28	28	28	28

*The Automatic Defrost feature is standard on D/S models and available as an option on D models.
Product Codes Abbreviations D: Freezer, S: Cooler, D/S: Freezer/Cooler, DF: Defrost, GB: Head Unit / Island Head

-  Wheels (optional)
-  Variable speed control compressor

GENERAL CHARACTERISTICS	UMD 2100 D ANTALYA	UMD 2100 D/S DF ANTALYA*	UMD 2500 D ANTALYA	UMD 2500 D/S DF ANTALYA*
Available Energy Class Options	D	D	D	D
Gross Volume (L)	1036	1034	1258	1256
Climate Class	3	3	3	3
Operating Temperature Range (°C)	-18/-23	-1/+5 // -18/-23	-18/-23	-1/+5 // -18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Automatic Defrost	No	Yes	No	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	2106x879x940	2106x879x940	2506x879x940	2506x879x940
W x D x H (mm) With Packaging	2170x915x1050	2170x915x1050	2570x915x1050	2570x915x1050
Weight Without Packaging (kg)	163	163	210	215
Weight With Packaging (kg)	180	180	230	235
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	12	12	8	8
Containers 40'	26	26	16	16
Containers 40' HC	26	26	16	16
13.6 Truck	28	28	20	20

*The Automatic Defrost feature is standard on D/S models and available as an option on D models.
Product Codes Abbreviations D: Freezer, S: Cooler, D/S: Freezer/Cooler, DF: Defrost, GB: Head Unit / Island Head

ISLAND FREEZERS

MARMARİS

Fully compatible with **İzmir** and **Antalya** freezer cabinets, enabling customized store layouts and a unified refrigeration concept.

 **MAXIMUM DISPLAY CAPACITY**

 **ENHANCED PRODUCT VISIBILITY**



UMD 1850 D3K D/S DF MARMARİS



UMD 1850 D ANTALYA

GENERAL CHARACTERISTICS	UMD 1850 D3K D/S DF MARMARİS	UMD 2100 D3K D/S DF MARMARİS	UMD 2500 D4K D/S DF MARMARİS
Available Energy Class Options	D	D	E
Gross Volume (L)	779	893	1074
Climate Class	3	3	3
Operating Temperature Range (°C)	-1/+5 // -18/-23	-1/+5 // -18/-23	-1/+5 // -18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Automatic Defrost	Yes	Yes	Yes
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1850x745x2430	2100x745x2430	2500x745x2430
W x D x H (mm) With Packaging	1960x780x1610	2210x780x1610	2610x780x1610
Weight Without Packaging (kg)	272	288	317
Weight With Packaging (kg)	300	320	265
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	9	7	6
Containers 40'	18	16	12
Containers 40' HC	18	16	12
13.6 Truck	20	18	15



UMD 1200 D2KL ASPEN



UDD 350 SCEBA

GENERAL CHARACTERISTICS	UDD 350 SCEBA*	UMD 1200 D2KL ASPEN
Available Energy Class Options	C / D	C
Gross Volume (L)	413	200
Climate Class	C/C1	3
Operating Temperature Range (°C)	-18 / -23	-18 / -23
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	275	HC
Automatic Defrost	No	No
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	1300x710x920	1275x636x1965
W x D x H (mm) With Packaging	1370x755x885	1380x675x1010
Weight Without Packaging (kg)	80,5	113,5
Weight With Packaging (kg)	85	170
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20"	24	22
Containers 40"	50	48
Containers 40" HC	75	50
13.6 Truck	84	56

*UDD 350 is compatible with SCEBA.

UGUR HoReCa

Ice Cream Display Cabinets	152
Bakery Display Cabinets	172
Cold Beverage Dispensers	174
Ice Makers	178
Water Dispensers	182





UDR 18 SIRIUS



Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display



UDR 24 SIRIUS



UDR 30 SIRIUS

GENERAL CHARACTERISTICS	UDR 18 SIRIUS	UDR 24 SIRIUS	UDR 30 SIRIUS
Available Energy Class Options	E	E	E
Climate Class	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	R290	R290	R290
Number of Trays (qty)	18	24	30
Cooling System	Fan Assisted	Fan Assisted	Fan Assisted
DIMENSIONS The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	1710x1125x1173	2170x1125x1173	2670x1125x1173
W x D x H (mm) With Packaging	1780x1170x1260	2240x1170x1260	2740x1170x1260
Weight Without Packaging (kg)	317	400	483
Weight With Packaging (kg)	336,5	432	515
LOADING CAPACITY The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20"	6	5	5
Containers 40"	12	10	10
Containers 40" HC	12	10	10
13.6 Truck	14	11	11

*Additional storage space is available on UDR 10 and larger models.



UDR 18 ERTUĞRUL



Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display




UDR 18 Fatih



UDR 18 Kanuni

GENERAL CHARACTERISTICS	UDR 18 Barbaros	UDR 18 Ertuğrul	UDR 18 Fatih	UDR 18 Kanuni
Available Energy Class Options	D	D	D	D
Climate Class	7	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Number of Trays (qty)	18	18	18	18
Cooling System	Fan Assisted	Fan Assisted	Fan Assisted	Fan Assisted
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	1715x1130x1380	1715x1140x1380	1725x1205x1380	1725x1140x1380
W x D x H (mm) With Packaging	1750x1170x1450	1750x1170x1450	1750x1170x1450	1750x1170x1450
Weight Without Packaging (kg)	326	326	326	326
Weight With Packaging (kg)	341	341	341	341
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	6	6	4	6
Containers 40'	13	13	9	13
Containers 40' HC	13	13	9	13
13.6 Truck	15	15	10	15

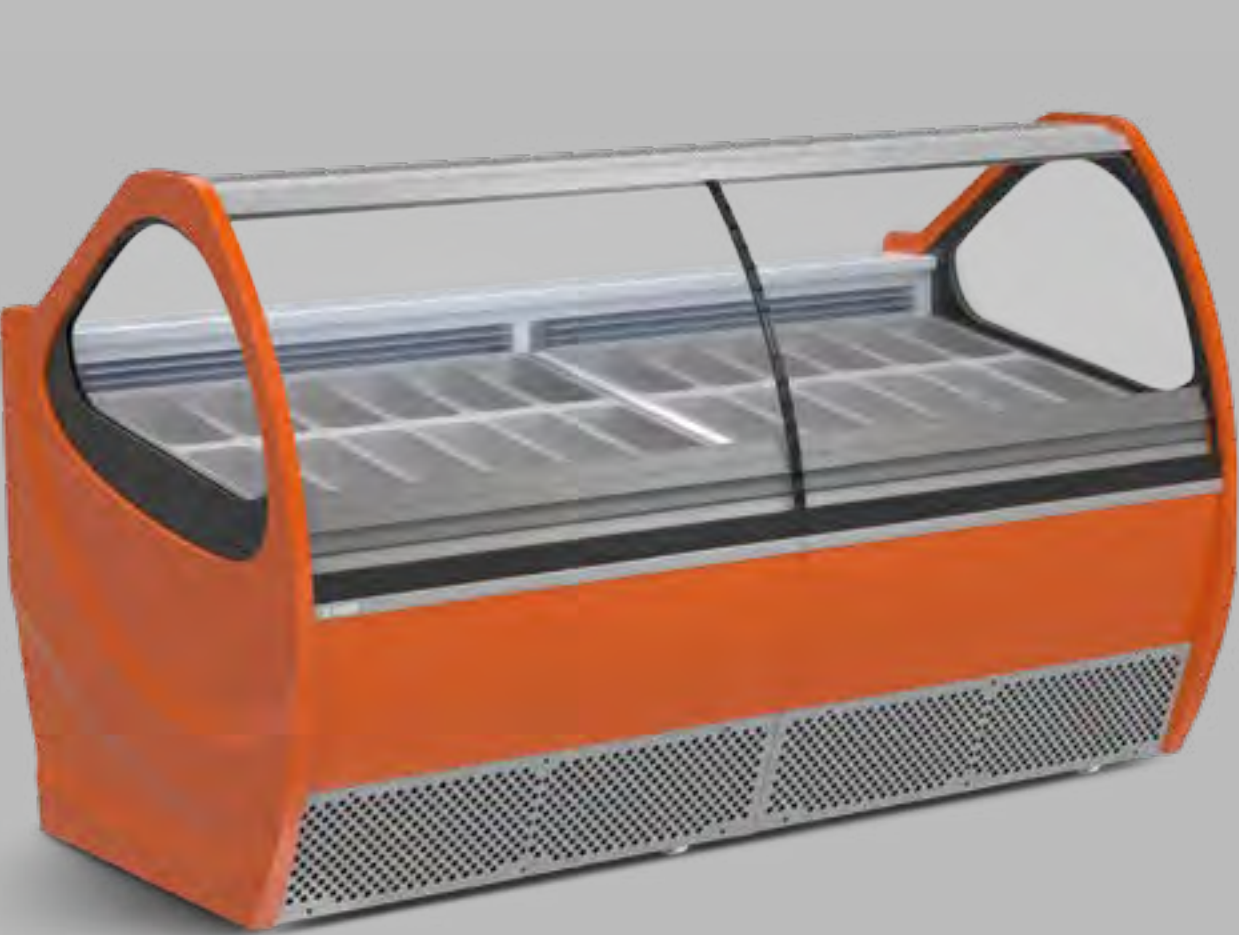

UDR 24 BARBAROS



Tempered glass



Customizable
branding area for
your brand




Double-row bowls,
excellent display



UDR 24 Fatih

GENERAL CHARACTERISTICS	UDR 24 Barbaros	UDR 24 Fatih
Available Energy Class Options	E	E
Climate Class	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
Number of Trays (qty)	24	24
Cooling System	Fan Assisted	Fan Assisted
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	2240x1130x1380	2240x1205x1380
W x D x H (mm) With Packaging	2420x1170x1450	2420x1170x1450
Weight Without Packaging (kg)	447	447
Weight With Packaging (kg)	479	479
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20'	4	2
Containers 40'	8	4
Containers 40' HC	8	4
13.6 Truck	11	10

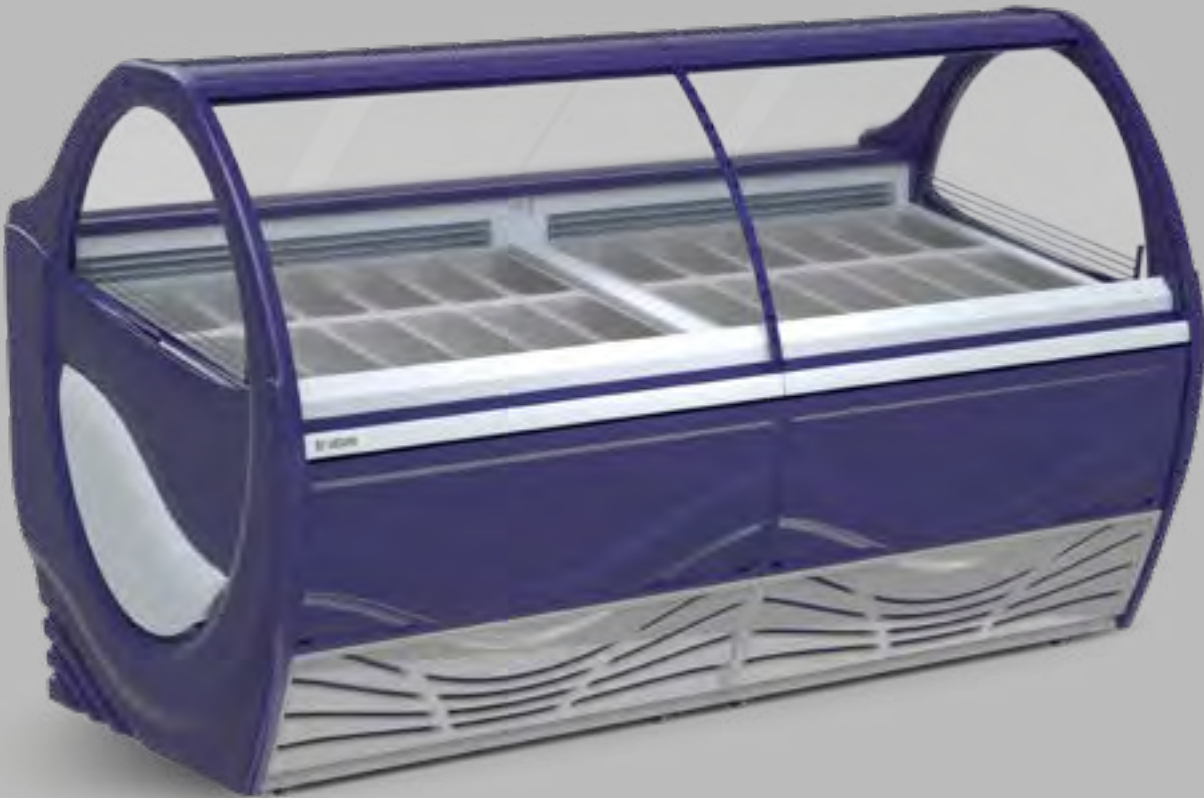

UDR 24 KANUNİ




Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display

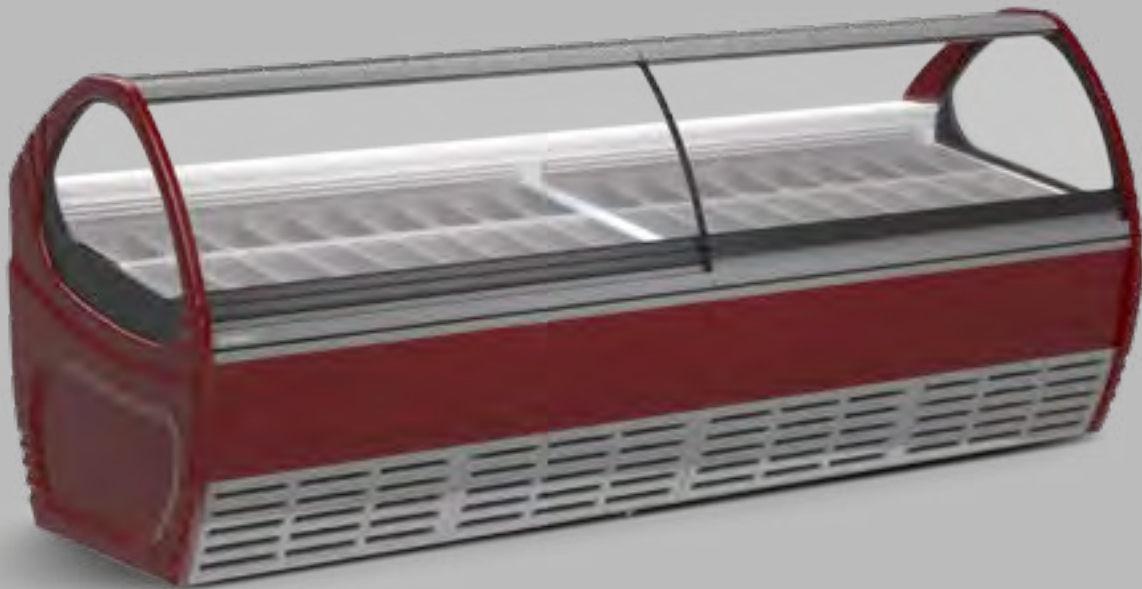

UDR 36 Ertuğrul

GENERAL CHARACTERISTICS	UDR 24 Kanunî	UDR 36 Ertuğrul
Available Energy Class Options	E	D
Climate Class	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HC	HC
Number of Trays (qty)	24	36
Cooling System	Fan Assisted	Fan Assisted
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	2250x1140x1380	3340x1140x1380
W x D x H (mm) With Packaging	2420x1170x1450	3500x1170x1450
Weight Without Packaging (kg)	447	650
Weight With Packaging (kg)	479	675
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20'	4	2
Containers 40'	8	6
Containers 40' HC	8	6
13.6 Truck	11	6



UDR 5 SCE TS



Tempered glass



Customizable
branding area for
your brand



Single-row bowls,
excellent display



UDR 7 SCE TS



UDR 8 SCE TS

GENERAL CHARACTERISTICS	UDR 5 SCE TS	UDR 7 SCE TS	UDR 8 SCE TS
Available Energy Class Options	A	A	A
Climate Class	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Number of Trays (qty)	5	7	8
Cooling System	Static	Static	Static
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1014x620x1296	1304x620x1296	1554x620x1296
W x D x H (mm) With Packaging	1100x750x940	1300x750x940	1640x750x940
Weight Without Packaging (kg)	60	65	79
Weight With Packaging (kg)	74	81	96
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	30	24	20
Containers 40'	64	50	42
Containers 40' HC	64	50	42
13.6 Truck	72	56	52



UDR 6 SCE



Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display



Excellent Display



UDR 10 SCE*



UDR 12 SCE*

GENERAL CHARACTERISTICS	UDR 6 SCE	UDR 8 SCE	UDR 10 SCE*	UDR 12 SCE*
Available Energy Class Options	B	B	B	B
Climate Class	7	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
Number of Trays (qty)	6	8	10	12
Cooling System	Static	Static	Static	Static
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	669x900x1255	1013x900x1255	1013x900x1255	1185x900x1255
W x D x H (mm) With Packaging	739x1010x1365	911x1010x1365	1083x1010x1365	1235x1010x1365
Weight Without Packaging (kg)	46	85	93	120
Weight With Packaging (kg)	67	102	113	141
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	17	12	10	8
Containers 40'	35	26	22	20
Containers 40' HC	35	26	22	20
13.6 Truck	39	28	26	24

*Additional storage space is available on UDR 10 and larger models.



UDR 14 SCE



Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display



Excellent Display




Extra Storage Space*

*Available on UDR 10 SCE and above.



UDR 16 SCE*

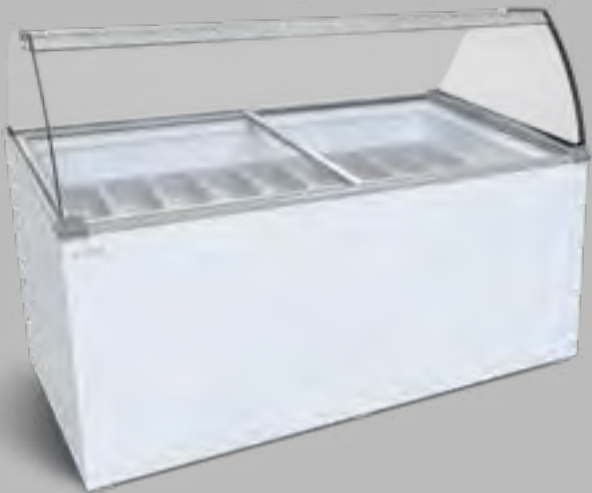

UDR 18 SCE*

GENERAL CHARACTERISTICS	UDR 14 SCE*	UDR 16 SCE*	UDR 18 SCE*
Available Energy Class Options	B	B	B
Climate Class	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
Number of Trays (qty)	14	16	18
Cooling System	Static	Static	Static
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1348x900x1255	1520x900x1255	1692x900x1255
W x D x H (mm) With Packaging	1418x1010x1365	1590x1010x1365	1762x1010x1365
Weight Without Packaging (kg)	142	164	186
Weight With Packaging (kg)	163	185	207
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	8	7	6
Containers 40'	16	14	13
Containers 40' HC	16	14	13
13.6 Truck	22	16	15

*Additional storage space is available on UDR 10 and larger models.



UDR 6 SCE Anka



Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display



Excellent Display



UDR 10 SCE Anka*



UDR 12 SCE Anka*

GENERAL CHARACTERISTICS	UDR 6 SCE Anka	UDR 8 SCE Anka	UDR 10 SCE Anka*	UDR 12 SCE Anka*
Available Energy Class Options	B	B	B	B
Climate Class	7	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	R290	R290	R290	R290
Number of Trays (qty)	6	8	10	12
Cooling System	Static	Static	Static	Static
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	71x1115x1275	883x1115x1275	1055x1115x1275	1227x1115x1275
W x D x H (mm) With Packaging	762x1130x1320	994x1130x1320	1106x1130x1320	1278x1130x1320
Weight Without Packaging (kg)	86	106	133	166
Weight With Packaging (kg)	113	132	159	181
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	15	12	10	8
Containers 40'	31	24	20	18
Containers 40' HC	31	24	20	18
13.6 Truck	36	28	24	22

*Additional storage space is available on UDR 10 and larger models.

UDR 16 SCE Anka



Tempered glass



Customizable
branding area for
your brand



Double-row bowls,
excellent display



Excellent Display



GENERAL CHARACTERISTICS	UDR 14 SCE Anka	UDR 16 SCE Anka	UDR 18 SCE Anka
Available Energy Class Options	B	B	B
Climate Class	7	7	7
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	R290	R290	R290
Number of Trays (qty)	14	16	18
Cooling System	Static	Static	Static
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	1390x1115x1275	1562x1115x1275	1734x1115x1275
W x D x H (mm) With Packaging	1441x1130x1320	1613x1130x1320	1785x1130x1320
Weight Without Packaging (kg)	188	210	232
Weight With Packaging (kg)	203	225	247
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20"	8	6	6
Containers 40"	16	14	13
Containers 40" HC	16	14	13
13.6 Truck	18	16	14

*Additional storage space is available on UDR 10 and larger models.

UDR 8 Vega



GENERAL CHARACTERISTICS	UDR 8 Vega
Available Energy Class Options	D
Climate Class	7
Operating Temperature Range (°C)	-18/-23
Voltage/Frequency (V/Hz)	230/50
Refrigerant Gas	HC
Number of Trays (qty)	8
Cooling System	Fan Assisted
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.
W x D x H (mm) Without Packaging	1160x1130x1380
W x D x H (mm) With Packaging	1200x1170x1450
Weight Without Packaging (kg)	260
Weight With Packaging (kg)	275
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.
Containers 20'	8
Containers 40'	20
Containers 40' HC	20
13.6 Truck	22



UPR 1A



Clear visibility



6 glass shelves



UPR 1500 B

GENERAL CHARACTERISTICS	UPR 1A	UPR 1500 B
Available Energy Class Options	D	D
Climate Class	4	3/H1
Operating Temperature Range (°C)	+1/+10	0/+10
Voltage/Frequency (V/Hz)	230/50	230/50
Refrigerant Gas	HFC	R134
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
W x D x H (mm) Without Packaging	775x805x1785	1543x805x1445
W x D x H (mm) With Packaging	920x950x2050	1685x940x1640
Weight Without Packaging (kg)	205	280
Weight With Packaging (kg)	215	295
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.	
Containers 20'	12	6
Containers 40'	26	14
Containers 40' HC	26	14
13.6 Truck	28	16



USM 10



Customized design



Color options



USM 10 A



USM 19



Other 3 Color Options: Black / Orange / Yellow

GENERAL CHARACTERISTICS	USM 10	USM 10 A	USM 19*
Energy Consumption (kWh/24h)	4	3,8	1,859
Climate Class	4	4	4
Operating Temperature Range (°C)	+5/+10	+5/+10	+5/+10
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	180x500x580	180x500x580	352x402x720
W x D x H (mm) With Packaging	280x580x660	280x580x780	390x480x780
Weight Without Packaging (kg)	21,5	20,5	18
Weight With Packaging (kg)	23	22	20
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20"	252	252	216
Containers 40"	504	504	450
Containers 40" HC	672	504	450
13.6 Truck	768	576	510



USM 20



Customized design



Color options



USM 2x20



USM 20+20 S/A

GENERAL CHARACTERISTICS	USM 20	USM 2x20	USM 2x10	USM 20+20 S/A
Energy Consumption (kWh/24h)	4,3	4,6	6,1	5,9
Climate Class	4	4	4	4
Operating Temperature Range (°C)	+5/+10	+5/+10	+5/+10	+5/+10
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
W x D x H (mm) Without Packaging	180x500x705	360x500x580	360x500x705	360x500x705
W x D x H (mm) With Packaging	280x580x780	390x520x780	390x520x780	460x580x780
Weight Without Packaging (kg)	23	31	32,5	32,5
Weight With Packaging (kg)	25	33	34	34
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.			
Containers 20'	252	198	198	150
Containers 40'	504	414	414	312
Containers 40' HC	504	414	414	312
13.6 Truck	576	468	468	348



UBM 12



Bullet shape ice



Easy to use



UBM 15



UBM 20

GENERAL CHARACTERISTICS	UBM 12	UBM 15	UBM 20
DIMENSIONS	222x294x290	300x220x330	380x435x431
Refrigerant Gas	R600a	R90	R290
Climate Class	SN/N/ST/T	SN/N/ST/T	SN/N/ST/T
Supply Voltage	220-240/50V/Hz	220-240/50V/Hz	220-240/50V/Hz
Water Tank (L)	1,3	-	-
Ice Capacity (L)	0,6	0,75	-
Daily Ice Production (Kg)	12	15	-
Electrical Safety Class	I	I	-
Low Water Level Indicator	Yes	-	-
Full Ice Indicator	Yes	-	-
Upper Water Tank Capacity (L)	-	0,5	-
Extra Water Tank Capacity (L)	-	1,5	-
Ice Capacity For One Cycle (Unit)	-	-	12
Ice Storage Capacity (kg)	-	-	1,2
Number of Ice Cubes Stored (pcs)	-	-	125
Ice-Making Capacity (At 20°C Ambient / 15°C Water Temp.)	-	-	20kg/24h
Net Weight (Kg)	-	-	17,2
Ice Type	-	-	Bullet Ice



UBM 30



High ice production capacity



UBM 60



UBM 100

GENERAL CHARACTERISTICS	UBM 30	UBM 60	UBM 100
Energy Consumption (kWh/24h)	10,8	14,5	17,2
Ice Making Capacity (kg/24h)	32 (20°C ambient/15°C inlet water)	48 (20°C ambient/15°C inlet water)	70 (20°C ambient/15°C inlet water)
Ice Capacity For One Cycle (Unit)	24	32	40
Weight of Ice (gr)	20-25	20-25	20-25
Ice Storage Capacity (kg)	10-12	20-24	35-40
DIMENSIONS	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
W x D x H (mm) Without Packaging	520x625x660	600x565x880	680x560x1130
W x D x H (mm) With Packaging	550x645x695	615x590x910	700x600x1170
Weight Without Packaging (kg)	46	63	71
Weight With Packaging (kg)	48	65	74
LOADING CAPACITY	The specified values apply to standard products. Dimensions and weight may vary depending on the options added to the products.		
Containers 20'	108	60	54
Containers 40'	216	120	120
Containers 40' HC	216	120	120
13.6 Truck	252	182	152



USP 2000 GDB



Hidden carboy



Optional filtered system



RO filter system



Original Uğur Water Filters



USP 3608 GDB 5SA



USP 3608 GDG 5SA

GENERAL CHARACTERISTICS	USP 85	USP 2000 GDB	USP 2000 GDG	USP 3608 GDB 5SA	USP 3608 GDG 5SA
Water Tank Capacity (lt)	57	-	-	-	-
Dimensions (W x D x H) (mm)	600x400x1385	358x339x1060	358x339x1060	358x339x1060	358x339x1060
Hot Tank Capacity (L)	-	-	-	0,8	0,8
Cold Tank Capacity (L)	-	-	-	3,6	3,6
Filter Quality	-	-	-	5	5
Type	-	Bottom Loading	Bottom Loading	-	-
Cold Water Capacity (L)	-	3,6	3,6	-	-
Color Options	-	Silver&Black/White	Silver&Black/White	Silver&Black/White	Silver&Black/White



Scan the QR code
for the digital catalog.



ugur.com.tr / ugur.com

The product specifications and images presented in this catalog are for informational purposes only. Uğur Soğutma A.Ş. cannot be held liable for any printing or typographical errors, or for technical changes resulting from manufacturing requirements or regulatory changes.

As part of its continuous product development policy, Uğur Soğutma A.Ş. reserves the right, without prior notice, to modify the design, technical specifications, materials, or packaging of the products featured in this catalog, or to discontinue any product and remove it from the catalog and product range entirely.

Date of Publication: September 2026